



# CHORUS

This is the accepted manuscript made available via CHORUS. The article has been published as:

## Linear Optical Quantum Metrology with Single Photons: Exploiting Spontaneously Generated Entanglement to Beat the Shot-Noise Limit

Keith R. Motes, Jonathan P. Olson, Evan J. Rabeaux, Jonathan P. Dowling, S. Jay Olson, and  
Peter P. Rohde

Phys. Rev. Lett. **114**, 170802 — Published 30 April 2015

DOI: [10.1103/PhysRevLett.114.170802](https://doi.org/10.1103/PhysRevLett.114.170802)

# Linear optical quantum metrology with single photons — Exploiting spontaneously generated entanglement to beat the shotnoise limit

Keith R. Motes,<sup>1</sup> Jonathan P. Olson,<sup>2</sup> Evan J. Rabeaux,<sup>2</sup>  
Jonathan P. Dowling,<sup>2</sup> S. Jay Olson,<sup>3</sup> and Peter P. Rohde<sup>1,4,\*</sup>

<sup>1</sup>*Centre for Engineered Quantum Systems, Department of Physics and Astronomy,  
Macquarie University, Sydney NSW 2113, Australia*

<sup>2</sup>*Hearne Institute for Theoretical Physics and Department of Physics & Astronomy,  
Louisiana State University, Baton Rouge, LA 70803*

<sup>3</sup>*Boise State University, Boise, ID 83725*

<sup>4</sup>*Centre for Quantum Computation and Intelligent Systems (QCIS),  
Faculty of Engineering & Information Technology,  
University of Technology, Sydney, NSW 2007, Australia*

(Dated: April 9, 2015)

Quantum number-path entanglement is a resource for super-sensitive quantum metrology and in particular provides for sub-shotnoise or even Heisenberg-limited sensitivity. However, such number-path entanglement has thought to have been resource intensive to create in the first place — typically requiring either very strong nonlinearities, or nondeterministic preparation schemes with feed-forward, which are difficult to implement. Very recently, arising from the study of quantum random walks with multi-photon walkers, as well as the study of the computational complexity of passive linear optical interferometers fed with single-photon inputs, it has been shown that such passive linear optical devices generate a superexponentially large amount of number-path entanglement. A logical question to ask is whether this entanglement may be exploited for quantum metrology. We answer that question here in the affirmative by showing that a simple, passive, linear-optical interferometer — fed with only uncorrelated, single-photon inputs, coupled with simple, single-mode, disjoint photodetection — is capable of significantly beating the shotnoise limit. Our result implies a pathway forward to practical quantum metrology with readily available technology.

Ever since the early work of Yurke & Yuen it has been understood that quantum number-path entanglement is a resource for super-sensitive quantum metrology, allowing for sensors that beat the shotnoise limit [1, 2]. Such devices would then have applications to super-sensitive gyroscopy [3], gravimetry [4], optical coherence tomography [5], ellipsometry [6], magnetometry [7], protein concentration measurements [8], and microscopy [9, 10]. This line of work culminated in the analysis of the bosonic NOON state  $(|N, 0\rangle + |0, N\rangle)/\sqrt{2}$ , where  $N$  is the total number of photons, which was shown to be optimal for local phase estimation with a fixed, finite number of photons, and in fact allows one to hit the Heisenberg limit and the Quantum Cramér-Rao Bound [11–14].

Let us consider the NOON state as an example, where for this state in a two-mode interferometer we have the condition of all  $N$  particles in the first mode (and none in the second mode) superimposed with all  $N$  particles in the second mode (and none in the first mode). While such a state is known to be optimal for sensing, its generation is also known to be highly problematic and resource intensive. There are two routes to preparing high-NOON states: the first is to deploy very strong optical nonlinearities [15, 16], and the second is to prepare them using measurement and feed-forward [17–19]. In many ways then NOON-state generators have had much in common with all-optical quantum computers and therefore are just as difficult to build [20]. In addition to the complicated state preparation, typically a complicated mea-

surement scheme, such as parity measurement at each output port, also had to be deployed [21].

Recently two independent lines of research, the study of quantum random walks with multi-photon walkers in passive linear-optical interferometers [22–24], as well as the quantum complexity analysis of the mathematical sampling problem using such devices [25, 26], has led to a somewhat startling yet inescapable conclusion — passive, multi-mode, linear-optical interferometers, fed with only uncorrelated single photon inputs in each mode (Fig. 1), produce quantum mechanical states of the photon field with path-number entanglement that grows superexponentially fast in the two resources of mode and photon-number [27]. What is remarkable is that this large degree of number-path entanglement is not generated by strong optical nonlinearities, nor by complicated measurement and feed-forward schemes, but by the natural evolution of the single photons in the passive linear optical device. Whilst such devices are often described to have ‘non-interacting’ photons in them, there is a type of photon-photon interaction generated by the demand of bosonic state symmetrization, which gives rise to the superexponentially large number-path entanglement via multiple applications of the Hong-Ou-Mandel effect [24]. It is known that linear optical evolution of single photons, followed by projective measurements, can give rise to ‘effective’ strong optical nonlinearities, and we conjecture that there is indeed a hidden Kerr-like nonlinearity at work also in these interferometers [28]. Like boson-

sampling [25], and unlike universal quantum computing schemes such as that by Knill, Laflamme, and Milburn [29], this protocol is deterministic and does not require any ancillary photons.

The advantage of such a setup for quantum metrology is that resources for generating and detecting single photons have become quite standardized and relatively straightforward to implement in the lab [30–36]. The community then is moving towards single photons, linear interferometers, and single-photon detectors all on a single, integrated, photonic chip, which then facilitates a roadmap for scaling up devices to large numbers of modes and photons. If all of this work could be put to use for quantum metrology, then a road to scalable metrology with number states would be at hand.

It then becomes a natural question to ask — since number-path entanglement is known to be a resource for quantum metrology — can a passive, multi-mode interferometer, fed only with easy-to-generate uncorrelated single photons in each mode, followed by uncorrelated single-photon measurements at each output, be constructed to exploit this number-path entanglement for super-sensitive (sub-shotnoise) operation? The answer is indeed yes, as we shall now show.

The phase-sensitivity,  $\Delta\varphi$ , of a metrology device can be defined in terms of the standard error propagation formula as,

$$\Delta\varphi = \frac{\sqrt{\langle\hat{O}^2\rangle - \langle\hat{O}\rangle^2}}{\left|\frac{\partial\langle\hat{O}\rangle}{\partial\varphi}\right|}, \quad (1)$$

where  $\langle\hat{O}\rangle$  is the expectation of the observable being measured and  $\varphi$  is the unknown phase we seek to estimate.

The photons evolve through a unitary network according to  $Ua_i^\dagger U^\dagger = \sum_j U_{ij}a_j^\dagger$ . In our protocol, we construct the  $n$ -mode interferometer  $\hat{U}$  to be,

$$\hat{U} = \hat{V} \cdot \hat{\Phi} \cdot \hat{\Theta} \cdot \hat{V}^\dagger, \quad (2)$$

which we call the quantum Fourier transform interferometer (QuFTI) because  $\hat{V}$  is the  $n$ -mode quantum Fourier transform matrix, with matrix elements given by,

$$V_{j,k}^{(n)} = \frac{1}{\sqrt{n}} \exp\left[\frac{-2ijk\pi}{n}\right]. \quad (3)$$

$\hat{\Phi}$  and  $\hat{\Theta}$  are both diagonal matrices with linearly increasing phases along the diagonal represented by,

$$\begin{aligned} \Phi_{j,k} &= \delta_{j,k} \exp\left[i(j-1)\varphi\right] \\ \Theta_{j,k} &= \delta_{j,k} \exp\left[i(j-1)\theta\right], \end{aligned} \quad (4)$$

where  $\varphi$  is the unknown phase one would like to measure and  $\theta$  is the control phase.  $\hat{\Theta}$  is introduced as a reference, which can calibrate the device by tuning  $\theta$  appropriately.

To see this tuning we combine  $\hat{\Phi}$  and  $\hat{\Theta}$  into a single diagonal matrix with a gradient given by,

$$\Phi_{j,k} \cdot \Theta_{j,k} = \delta_{j,k} \exp\left[i(j-1)(\varphi + \theta)\right]. \quad (5)$$

The control phase  $\theta$  can shift this gradient to the optimal measurement regime, which can be found by minimizing  $\Delta\varphi$  with respect to  $n$  and  $\varphi$ . Since this is a shift according to a known phase, we can for simplicity assume (and without loss of generality) that  $\varphi$  is in the optimal regime for measurements and  $\theta = 0$ . Thus,  $\hat{\Theta} = \hat{I}$  and is left out of our analysis for simplicity.

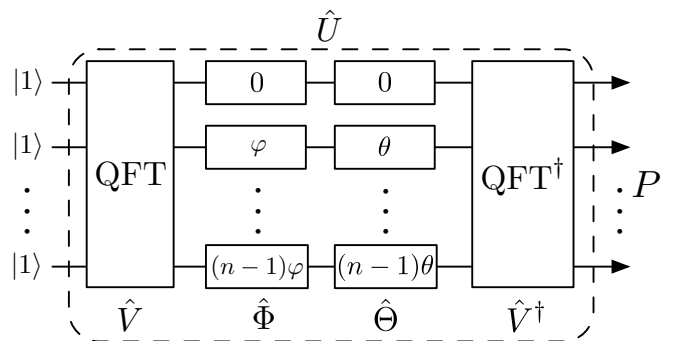


FIG. 1: Architecture of the quantum Fourier transform interferometer (QuFTI) for metrology using single-photon states. The input state comprises  $n$  single photons,  $|1\rangle^{\otimes n}$ . The state evolves via the passive linear optics unitary  $\hat{U} = \hat{V} \cdot \hat{\Phi} \cdot \hat{\Theta} \cdot \hat{V}^\dagger$ , where  $\hat{V}$  is the quantum Fourier transform,  $\hat{\Phi}$  is an unknown, linear phase gradient, and  $\hat{\Theta}$  is a reference phase gradient used for calibration. At the output we perform a coincidence photodetection projecting on exactly one photon per output mode, measuring the observable  $\hat{O} = (|1\rangle\langle 1|)^{\otimes n}$ , which, over many measurements, yields the probability distribution  $P(\varphi)$  that acts as a witness for the unknown phase  $\varphi$ .

In order to understand how such a linearly increasing array of unknown phase shifts may be arranged in a practical device, it is useful to consider a specific example. Let us suppose that we are to use the quantum Fourier transform interferometer (QuFTI) as an optical magnetometer. We consider an interferometric magnetometer of the type discussed in Ref. [37], where each of the sensing modes of the QuFTI contains a gas cell of Rubidium prepared in a state of electromagnetically induced transparency (EIT) manually designed to implement the linear phase gradient. In this state, a photon passing through the cell at the point of zero absorption in the EIT spectrum acquires a phase shift that is proportional to the product of an applied uniform (but unknown) magnetic field and the length of the cell. We assume that the field is uniform across the QuFTI, as would be the case if the entire interferometer was constructed on an all optical chip and the field gradient across the chip were negligible. Since we are carrying out local phase measurements

(not global) we are not interested in the magnitude of the magnetic field but wish to know if the field changes and if so by how much. (Often we are interested in if the field is oscillating and with what frequency.) Neglecting other sources of noise then in an ordinary Mach-Zehnder interferometer this limit would be set by the photon shotnoise limit. To construct a QuFTI with the linear cascade of phase shifters, as shown in Fig. 1, we simply increase the length of the cell by integer amounts in each mode. The first cell has length  $L$ , the second length  $2L$ , and so forth. This will then give us the linearly increasing configuration of unknown phase shifts required for the QuFTI to beat the shotnoise limit.

One might question why one would employ a phase gradient rather than just a single phase. Investigation into using a single phase in  $\hat{\Phi}$  indicates that this yields no benefit. We conjecture that this is because the number of paths interrogating a phase in a single mode is not superexponential as is the case when a phase gradient is employed.

The interferometer may always be constructed efficiently following the protocol of Reck *et al.* [38], who showed that an  $n \times n$  linear optics interferometer may be constructed from  $O(n^2)$  linear optical elements (beam-splitters and phase-shifters), and the algorithm for determining the circuit has runtime polynomial in  $n$ . Thus, an experimental implementation of our protocol may always be efficiently realized.

The input state to the device is  $|1\rangle^{\otimes n}$ , i.e. single photons inputted in each mode. If  $\varphi = 0$  then  $\hat{\Phi} = \hat{I}$  and thus  $\hat{U} = \hat{V} \cdot \hat{I} \cdot \hat{V}^\dagger = \hat{I}$ . In this instance, the output state is exactly equal to the input state,  $|1\rangle^{\otimes n}$ . Thus, if we define  $P$  as the coincidence probability of measuring one photon in each mode at the output, then  $P = 1$  when  $\varphi = 0$ . When  $\varphi \neq 0$ , in general  $P < 1$ . Thus, intuitively, we anticipate that  $P(\varphi)$  will act as a witness for  $\varphi$ .

In the protocol, assuming a lossless device, no measurement events are discarded. Upon repeating the protocol many times, let  $x$  be the number of measurement outcomes with exactly one photon per mode, and  $y$  be the number of measurement outcomes without exactly one photon per mode. Then  $P$  is calculated as  $P = x/(x+y)$ . Thus, all measurement outcomes contribute to the signal and none are discarded. Note that, due to preservation of photon-number and the fact that we are considering the anti-bunched outcome,  $P(\varphi)$  may be experimentally determined using non-number-resolving detectors if the device is lossless. If the device is assumed to be lossy, then number-resolving detectors would be necessary to distinguish between an error outcome and one in which more than one photon exits the same mode. The circuit for the architecture is shown in Fig. 1.

The state at the output to the device is a highly path-entangled superposition of  $\binom{2n-1}{n}$  terms, which grows superexponentially with  $n$ . This corresponds to the number of ways to add  $n$  non-negative integers whose sum is  $n$ , or

equivalently, the number of ways to put  $n$  indistinguishable balls into  $n$  distinguishable boxes. We conjecture that this superexponential path-entanglement yields improved phase-sensitivity as the paths query the phases a superexponential number of times.

The observable being measured is the projection onto the state with exactly one photon per output mode,  $\hat{O} = (|1\rangle\langle 1|)^{\otimes n}$ . Thus,  $\langle \hat{O} \rangle = \langle \hat{O}^2 \rangle = P$ . And, the phase-sensitivity estimator reduces to,

$$\Delta\varphi = \frac{\sqrt{P - P^2}}{\left| \frac{\partial P}{\partial \varphi} \right|}. \quad (6)$$

Following the result of [39],  $P$  is related to the permanent of  $\hat{U}$  as,

$$P = |\text{Per}(U)|^2. \quad (7)$$

Here the permanent of the full  $n \times n$  matrix is computed, since exactly one photon is going into and out of every mode. This is unlike the boson-sampling protocol [25] where permanents of sub-matrices are computed.

We will now examine the structure of this permanent. The matrix form for the  $n$ -mode unitary  $\hat{U}^{(n)}$  is given by,

$$U_{j,k}^{(n)} = \frac{1 - e^{in\varphi}}{n(e^{2i\pi(j-k)/n} - e^{i\varphi})}, \quad (8)$$

as derived in [40]. Taking the permanent of this matrix is challenging as calculating permanents are in general  $\#\mathbf{P}$ -hard. However, based on calculating  $\text{Per}(\hat{U}^{(n)})$  for small  $n$ , we observe the empirical pattern,

$$\text{Per}(\hat{U}^{(n)}) = \frac{1}{n^{n-1}} \prod_{j=1}^{n-1} [je^{in\varphi} + n - j], \quad (9)$$

as conjectured in [40]. This analytic pattern we observe is not a proof of the permanent, but an empirical pattern — a conjecture — that has been verified by brute force to be correct up to  $n = 25$ . Although we don't have a proof beyond that point,  $n = 25$  is well beyond what will be experimentally viable in the near future, and thus the pattern we observe is sufficient for experimentally enabling super-sensitive metrology with technology available in the foreseeable future.

Following as a corollary to the previous conjecture, the coincidence probability of measuring one photon in each mode is,

$$\begin{aligned} P &= \left| \text{Per}(\hat{U}^{(n)}) \right|^2 \\ &= \frac{1}{n^{2n-2}} \prod_{j=1}^{n-1} [a_n(j)\cos(n\varphi) + b_n(j)], \end{aligned} \quad (10)$$

as shown in [40], where

$$\begin{aligned} a_n(j) &= 2j(n-j), \\ b_n(j) &= n^2 - 2jn + 2j^2. \end{aligned} \quad (11)$$

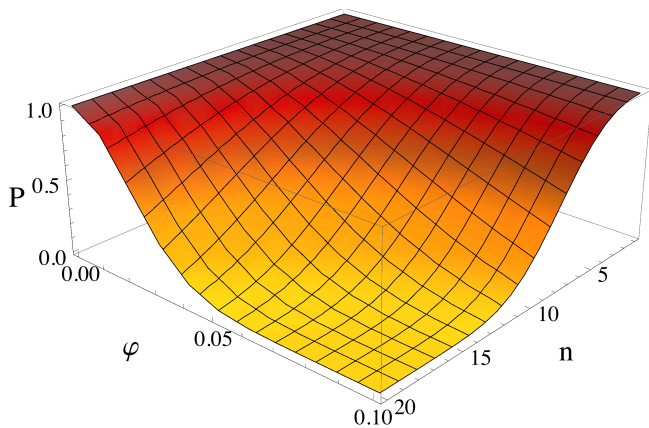


FIG. 2: Coincidence photodetection probability  $P$  against the unknown phase  $\varphi$  and the number of photons and modes  $n$ . As  $n$  increases, the dependence of  $P$  on  $\varphi$  increases, resulting in improved phase-sensitivity.

The dependence of  $P$  on  $n$  and  $\varphi$  is shown in Fig. 2.

It then follows that,

$$\left| \frac{\partial P}{\partial \varphi} \right| = nP |\sin(n\varphi)| \sum_{j=1}^{n-1} \frac{a_n(j)}{a_n(j)\cos(n\varphi) + b_n(j)}, \quad (12)$$

as shown in [40].

Finally, we wish to establish the scaling of  $\Delta\varphi$ . With a small  $\varphi$  approximation ( $\sin(\varphi) \approx \varphi$ ,  $\cos(\varphi) \approx 1 - \frac{1}{2}\varphi^2$ ) we find,

$$\begin{aligned} \Delta\varphi &= \sqrt{\frac{3}{2n(n+1)(n-1)}} \\ &= \frac{1}{2\sqrt{\binom{n+1}{3}}}, \end{aligned} \quad (13)$$

as shown in [40]. Thus, the phase sensitivity scales as  $\Delta\varphi = O(1/n^{3/2})$  as shown in Fig. 3.

We would like to compare the performance of our QuFTI to an equivalent multimode interferometer baseline for which we will construct the shotnoise limit (SNL) and Heisenberg limit (HL). This is a subtle comparison, due to the linearly increasing unknown phase-shifts,  $\{0, \varphi, \dots, (n-1)\varphi\}$ , that the QuFTI requires to operate. The mathematical relation is shown in Fig. 3, where we have converted the number of resources,  $N$ , to the number of photons,  $n$ . There is disagreement in the community on how such resources should be counted. This is the method that we feel most fairly counts our resources. A more detailed supporting discussion can be found in [40].

We have shown that a passive linear optics network fed with single-photon Fock states may implement quantum metrology with phase-sensitivity that beats the shotnoise limit. Unlike other schemes that employ exotic states

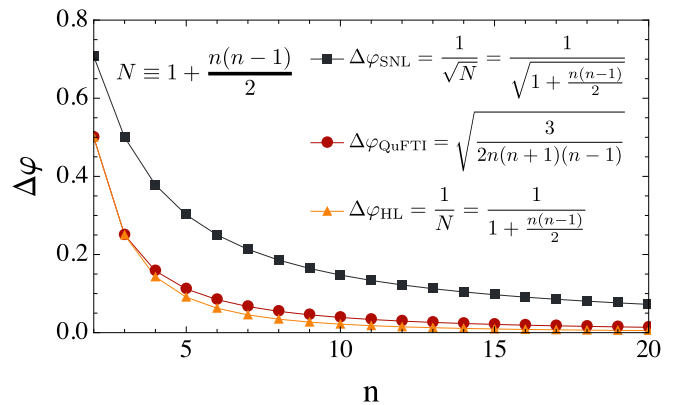


FIG. 3: Phase-sensitivity  $\Delta\varphi$  against the number of photons  $n$  (red circles). The shotnoise limit of  $1/\sqrt{N}$  (black squares) and Heisenberg limit of  $1/N$  (orange triangles) are shown for comparison. The QuFTI exhibits phase-sensitivity significantly better than the shotnoise limit, and only slightly worse than the Heisenberg limit.

such as NOON states, which are notoriously difficult to prepare, single-photon states may be readily prepared in the laboratory using present-day technology. Furthermore, we show in [40] that this network is far more robust against dephasing than the NOON state. This new approach to metrology via easy-to-prepare single-photon states and disjoint photodetection provides a road towards improved quantum metrology with frugal physical resources.

While computing the sensitivity using the standard error propagation formula of Eq. 1 provides clear evidence that our scheme does indeed beat the SNL, it would be instructive to carry out a calculation of the quantum Fisher information and thereby provide the quantum Cramér-Rao bound, which would be a true measure of the best performance of this scheme possible, according to the laws of quantum theory. However, due to the need to compute the permanent of large matrices with complex entries, this calculation currently remains intractable. We will continue to investigate such a computation for a future work. In general, analytic solutions to matrix permanents are not possible. In this instance, the analytic result is facilitated by the specific structure of the QuFTI unitary. Other inhomogeneous phase gradients may yield analytic results, but we leave this for future work.

We thank Dominic Berry, Alexei Gilchrist, & Michael Bremner for helpful discussions. We would also like to thank Kaushik Seshadreesan and Hwang Lee for helpful discussion on resource counting. KRM and PPR would like to acknowledge the Australian Research Council Centre of Excellence for Engineered Quantum Systems (Project number CE110001013). JPO, EJR, and JPD would like to acknowledge support from the Air Force Office of Scientific research, the Army Research Office, and the National Science Foundation.

- 
- \* [dr.rohde@gmail.com](mailto:dr.rohde@gmail.com); URL: <http://www.peterrohde.org>
- [1] B. Yurke, Phys. Rev. Lett **56**, 1515 (1986).
- [2] H. P. Yuen, Phys. Rev. Lett. **56**, 2176 (1986).
- [3] J. P. Dowling, Phys. Rev. A **57**, 4736 (1998).
- [4] U. Yurtsever, D. Strelakov, and J. Dowling, Euro. Phys. J. DToussaint, **22**, 365 (2003).
- [5] M. B. Nasr, B. E. Saleh, A. V. Sergienko, and M. C. Teich, Phys. Rev. Lett. **91**, 083601 (2003).
- [6] K. Toussaint, Jr., G. D. Giuseppe, K. J. Bycenski, A. V. Sergienko, B. E. A. Saleh, and M. C. Teich, Phys. Rev. A **70**, 023801 (2004).
- [7] J. A. Jones, S. D. Karlen, J. Fitzsimons, A. Ardavan, S. C. Benjamin, G. A. D. Briggs, and J. J. Morton, Science **324**, 1166 (2009).
- [8] A. Crespi, M. Lobino, J. C. Matthews, A. Politi, C. R. Neal, R. Ramponi, R. Osellame, and J. L. O'Brien, App. Phys. Lett. **100**, 233704 (2012).
- [9] L. A. Rozema, J. D. Bateman, D. H. Mahler, R. Okamoto, A. Feizpour, A. Hayat, and A. M. Steinberg, Phys. Rev. Lett. **112**, 223602 (2014).
- [10] Y. Israel, S. Rosen, and Y. Silberberg, Phys. Rev. Lett. **112**, 103604 (2014).
- [11] M. Holland and K. Burnett, Phys. Rev. Lett. **71**, 1355 (1993).
- [12] H. Lee, P. Kok, and J. P. Dowling, J. Mod. Opt. **49**, 2325 (2002).
- [13] G. A. Durkin and J. P. Dowling, Phys. Rev. Lett. **99**, 070801 (2007).
- [14] J. P. Dowling, Contemp. Phys. **49**, 125 (2008).
- [15] C. C. Gerry and R. Campos, Phys. Rev. A **64**, 063814 (2001).
- [16] K. T. Kapale and J. P. Dowling, Phys. Rev. Lett. **99**, 053602 (2007).
- [17] H. Lee, P. Kok, N. J. Cerf, and J. P. Dowling, Phys. Rev. A **65**, 030101 (2002).
- [18] N. VanMeter, P. Lougovski, D. Uskov, K. Kieling, J. Eisert, and J. P. Dowling, Phys. Rev. A **76**, 063808 (2007).
- [19] H. Cable and J. P. Dowling, Phys. Rev. Lett. **99**, 163604 (2007).
- [20] P. Kok, W. J. Munro, K. Nemoto, T. C. Ralph, J. P. Dowling, and G. Milburn, Rev. Mod. Phys. **79**, 135 (2007).
- [21] K. P. Seshadreesan, S. Kim, J. P. Dowling, and H. Lee, Phys. Rev. A **87**, 043833 (2013).
- [22] K. Mayer, M. C. Tichy, F. Mintert, T. Konrad, and A. Buchleitner, Phys. Rev. A **83**, 062307 (2011).
- [23] B. T. Gard, R. M. Cross, P. M. Anisimov, H. Lee, and J. P. Dowling, J. Opt. Soc. Am. B **30**, 1538 (2013).
- [24] B. T. Gard, J. P. Olson, R. M. Cross, M. B. Kim, H. Lee, and J. P. Dowling, Phys. Rev. A **89**, 022328 (2014).
- [25] S. Aaronson and A. Arkhipov, Proc. ACM STOC (New York) p. 333 (2011).
- [26] B. T. Gard, K. R. Motes, J. P. Olson, P. P. Rohde, and J. P. Dowling (2014), arXiv:1406.6767.
- [27] See, for another practical application of the complexity of linear optics, J. Huh, G. G. Guerreschi, B. Peropadre, J. R. McClean, and A. Aspuru-Guzikl (2014), quant-ph/1412.8427.
- [28] G. Lapaire, P. Kok, J. P. Dowling, and J. Sipe, Phys. Rev. A **68**, 042314 (2003).
- [29] E. Knill, R. Laflamme, and G. J. Milburn, Nature **409**, 46 (2001).
- [30] J. C. Matthews, A. Politi, D. Bonneau, and J. L. O'Brien, Phys. Rev. Lett. **107**, 163602 (2011).
- [31] J. B. Spring, B. J. Metcalf, P. C. Humphreys, W. S. Kolthammer, X.-M. Jin, M. Barbieri, A. Datta, N. Thomas-Peter, N. K. Langford, D. Kundys, et al., Science **339**, 798 (2013).
- [32] M. A. Broome, A. Fedrizzi, S. Rahimi-Keshari, J. Dove, S. Aaronson, T. C. Ralph, and A. G. White, Science **339**, 6121 (2013).
- [33] A. Crespi, R. Osellame, R. Ramponi, D. J. Brod, E. F. Galvão, N. Spagnolo, C. Vitelli, E. Maiorino, P. Mataloni, and F. Sciarrino, Nature Phot. **7**, 545 (2013).
- [34] T. Ralph, Nature Phot. **7**, 514 (2013).
- [35] K. R. Motes, J. P. Dowling, and P. P. Rohde, Phys. Rev. A **88**, 063822 (2013).
- [36] N. Spagnolo, C. Vitelli, M. Bentivegna, D. J. Brod, A. Crespi, F. Flamini, S. Giacomini, G. Milani, R. Ramponi, P. Mataloni, et al., Nature Phot. **8**, 615 (2014).
- [37] M. O. Scully and M. Fleischhauer, Phys. Rev. Lett. **69**, 1360 (1992).
- [38] M. Reck, A. Zeilinger, H. J. Bernstein, and P. Bertani, Phys. Rev. Lett. **73**, 58 (1994).
- [39] S. Scheel (2004), quant-ph/0406127; See also, S. Scheel, S. Y. Buhmann, Acta Physica Slovaca 58, 675 (2008), and Quantum Information Processing, T. Beth, G. Leuchs, Eds., Ch. 28 (Wiley-VCH, Weinheim, 2005).
- [40] See Supplemental Material [url], which includes Refs. [41-45].
- [41] M. O. Scully and J. P. Dowling, Phys. Rev. A **48**, 3186 (1993).
- [42] D. Fukuda, G. Fujii, T. Numata, K. Amemiya, A. Yoshizawa, H. Tsuchida, H. Fujino, H. Ishii, T. Itatani, S. Inoue, et al., Opt. Express **19**, 870 (2011).
- [43] L. A. Ngah, O. Alibart, L. Labont, V. D'Auria, and S. Tanzilli, Laser & Photonics Reviews (2015), ISSN 1863-8899.
- [44] S. Maier, P. Gold, A. Forchel, N. Gregersen, J. Mørk, S. Höfling, C. Schneider, and M. Kamp, Opt. Express **22**, 8136 (2014).
- [45] J. D. B. R. Bardan, K. Jiang, Phys. Rev. A **88**, 023857 (2013).