

This is the accepted manuscript made available via CHORUS. The article has been published as:

# Demonstration of Fuel Hot-Spot Pressure in Excess of 50 Gbar for Direct-Drive, Layered Deuterium-Tritium Implosions on OMEGA

S. P. Regan *et al.*

Phys. Rev. Lett. **117**, 025001 — Published 7 July 2016

DOI: [10.1103/PhysRevLett.117.025001](https://doi.org/10.1103/PhysRevLett.117.025001)

## Demonstration of fuel hot-spot pressure in excess of 50 Gbar for direct-drive, layered deuterium–tritium implosions on OMEGA

S. P. Regan,<sup>1</sup> V. N. Goncharov,<sup>1</sup> I. V. Igumenshchev,<sup>1</sup> T. C. Sangster,<sup>1</sup> R. Betti,<sup>1,2,\*</sup> **A. Bose,**<sup>2</sup> T. R. Boehly,<sup>1</sup> M. J. Bonino,<sup>1</sup> E. M. Campbell,<sup>1</sup> D. Cao,<sup>1</sup> T. J. B. Collins,<sup>1</sup> R. S. Craxton,<sup>1</sup> A. K. Davis,<sup>1</sup> J. A. Delettrez,<sup>1</sup> D. H. Edgell,<sup>1</sup> R. Epstein,<sup>1</sup> C. J. Forrest,<sup>1</sup> J. A. Frenje,<sup>3</sup> D. H. Froula,<sup>1</sup> M. Gatu Johnson,<sup>3</sup> V. Yu. Glebov,<sup>1</sup> D. R. Harding,<sup>1</sup> M. Hohenberger,<sup>1</sup> S. X. Hu,<sup>1</sup> D. Jacobs-Perkins,<sup>1</sup> R. Janezic,<sup>1</sup> M. Karasik,<sup>4</sup> R. L. Keck,<sup>1</sup> J. H. Kelly,<sup>1</sup> T. J. Kessler,<sup>1</sup> J. P. Knauer,<sup>1</sup> T. Z. Kosc,<sup>1</sup> S. J. Loucks,<sup>1</sup> J. A. Marozas,<sup>1</sup> F. J. Marshall,<sup>1</sup> R. L. McCrory,<sup>1,\*</sup> P. W. McKenty,<sup>1</sup> D. D. Meyerhofer,<sup>5</sup> D. T. Michel,<sup>1</sup> J. F. Myatt,<sup>1</sup> S. P. Obenshain,<sup>4</sup> R. D. Petrasso,<sup>3</sup> P. B. Radha,<sup>1</sup> B. Rice,<sup>1</sup> M. Rosenberg,<sup>1</sup> A. J. Schmitt,<sup>4</sup> M. J. Schmitt,<sup>5</sup> W. Seka,<sup>1</sup> W. T. Shmayda,<sup>1</sup> M. J. Shoup III,<sup>1</sup> A. Shvydky,<sup>1</sup> S. Skupsky,<sup>1</sup> A. A. Solodov,<sup>1</sup> C. Stoeckl,<sup>1</sup> W. Theobald,<sup>1</sup> J. Ulreich,<sup>1</sup> M. D. Wittman,<sup>1</sup> **K. M. Woo,**<sup>1,2</sup> B. Yaakobi,<sup>1</sup> and J. D. Zuegel<sup>1</sup>

<sup>1</sup>*Laboratory for Laser Energetics, University of Rochester, Rochester, New York*

<sup>2</sup>*Fusion Science Center, University of Rochester, Rochester, New York*

<sup>3</sup>*Massachusetts Institute of Technology, Plasma Science and Fusion Center, Cambridge, Massachusetts*

<sup>4</sup>*Naval Research Laboratory, Washington, D.C.*

<sup>5</sup>*Los Alamos National Laboratory, Los Alamos, New Mexico*

*\*Also Departments of Mechanical Engineering and Physics & Astronomy, University of Rochester, Rochester, NY*

A record fuel hot-spot pressure  $P_{\text{hs}} = 56 \pm 7$  Gbar was inferred from x-ray and nuclear diagnostics for direct-drive inertial confinement fusion cryogenic, layered deuterium–tritium implosions on the 60-beam, 30-kJ, 351-nm OMEGA Laser System. When hydrodynamically-scaled to the energy of the National Ignition Facility (NIF), these implosions achieved a Lawson parameter ~60% of the value required for ignition [**A. Bose *et al.*, Phys. Rev. E (in press)**], similar to indirect-drive implosions [R. Betti *et al.*, Phys. Rev. Lett. **114**, 255003 (2015)], and nearly half of the direct-drive ignition-threshold pressure. Relative to symmetric, one-dimensional simulations, the inferred hot-spot pressure is approximately 40% lower. Three-dimensional simulations suggest that low-mode distortion of the hot spot seeded by laser-drive nonuniformity and target-positioning error reduces target performance.

PACS: 52.57.-z, 52.38.Ph, 52.38.Kd, 52.70.La

The spherical concentric layers of a direct-drive inertial confinement fusion (ICF) target nominally consist of a central region of a near equimolar deuterium and tritium (DT) vapor surrounded by a cryogenic DT-fuel layer and a thin, nominally plastic (CH) ablator. The outer surface of the ablator is uniformly irradiated with multiple laser beams having a peak, overlapped intensity of  $<10^{15}$  watts/cm<sup>2</sup>. The resulting laser-ablation process causes the target to accelerate and implode. As the DT-fuel layer decelerates, the initial DT vapor and the fuel mass thermally ablated from the inner surface of the ice layer are compressed and form a central hot spot, in which fusion reactions occur. ICF relies on the 3.5 MeV DT-fusion alpha particles depositing their energy in the hot spot, causing the hot-spot temperature to rise sharply and a thermonuclear burn wave to propagate out through the surrounding nearly-degenerate, cold dense DT fuel, producing significantly more energy than was used to heat and compress the fuel. Ignition is predicted to occur when the product of the temperature and areal density of the hot spot reach a minimum of  $5 \text{ keV} \times 0.3 \text{ g/cm}^2$  [1–3].

Currently, the 192-beam, 351-nm, 1.8-MJ National Ignition Facility (NIF) [4] is configured for indirect-drive-ignition experiments using laser-driven hohlraums to accelerate targets via x-ray ablation. Approximately 26 kJ of thermonuclear fusion energy has been recorded on the NIF using indirect-drive ICF targets [5], where alpha heating has boosted the fusion yield by a factor of  $\sim 2.5$  from that caused by the implosion system alone [6, 7]. The indirect drive NIF implosions have achieved over 60% of the Lawson parameter  $P\tau$  required for ignition, where  $P$  is the pressure and  $\tau$  is the confinement time [6]. Here  $P$  and  $\tau$  are estimated without accounting for alpha heating to assess the pure

hydrodynamic performance. The goal of achieving laboratory fusion and progress made with direct-drive ICF over the last decade motivate direct-drive implosions on NIF [8, 9]. Hot-spot formation for spherically symmetric, direct-drive, DT-layered implosions is studied on the 60-beam, 30-kJ, 351-nm OMEGA Laser System [10] using hydrodynamically scaled ignition targets [11]. The radius of the target and the laser pulse duration scale with the laser energy as  $E_{\text{laser}}^{1/3}$ , and the laser power scales as  $E_{\text{laser}}^{2/3}$ .

This Letter demonstrates a record hot-spot pressure  $P_{\text{hs}} = 56 \pm 7$  Gbar was inferred for direct-drive ICF cryogenic, layered deuterium–tritium implosions on OMEGA using a suite of diagnostics including an x-ray imager having a 6- $\mu\text{m}$  spatial resolution and 30-ps temporal resolution [12] and a neutron rate detector with a 40-ps impulse response function [13]. This is nearly half of the ignition-threshold  $P_{\text{hs}} = 120\text{--}150$  Gbar for direct drive ICF scaled to NIF energies. These hydrodynamically-scaled OMEGA implosions achieved an energy-scaled [14, 15], generalized Lawson criterion without alpha heating of 60% [15], similar to indirect-drive [6]. Relative to symmetric, one-dimensional (1-D) simulations, the inferred  $P_{\text{hs}}$  is approximately 40% lower. Three-dimensional (3-D) simulations suggest that low-mode distortion of the hot spot seeded by laser-drive nonuniformity and target-positioning error reduces the neutron rate and the inferred  $P_{\text{hs}}$ . These results indicate that higher  $P_{\text{hs}}$  could be realized by reducing the sources of the low-mode asymmetry, which is important for direct-drive ICF research to achieve an ignition-relevant  $P_{\text{hs}} > 100$  Gbar on OMEGA, and the quest for ignition on NIF.

The  $P_{\text{hs}}$  and the conversion efficiency of the laser energy into shell kinetic energy and the hot-spot internal energy  $E_{\text{hs}}$  are critical parameters for ignition. The  $P_{\text{hs}}$  scales

[11] as  $P_{\text{hs}} \sim P_{\text{abl}}^{1/3} v_{\text{imp}}^{10/3} / \alpha$ , where  $P_{\text{abl}}$  is the ablation pressure,  $v_{\text{imp}}$  is the implosion velocity (maximum mass-averaged shell velocity), and  $\alpha$  is the adiabat, defined as the mass-averaged ratio of the fuel pressure to the Fermi-degenerate pressure  $P_{\text{Fermi}}$  in the dense imploding DT shell ( $\alpha \equiv P/P_{\text{Fermi}}$ ). In the cross-beam energy transfer (CBET) process [16], non-absorbed light that is reflected/scattered from its critical surface or refracted from the under-dense plasma acts as an electromagnetic seed for the stimulated Brillouin scatter of incoming (incident) light [17]. CBET has been shown to reduce the target absorption and resulting  $P_{\text{abl}}$  of direct-drive ICF targets by as much as 40% on OMEGA [16] and 60% on NIF-scale targets [18]; hydrodynamic instabilities and low-mode drive asymmetries can reduce  $P_{\text{hs}}$  and neutron rate; and the suprathermal electron generation by the two-plasmon-decay instability and stimulated Raman scattering [19] can preheat the DT fuel and raise  $\alpha$ .

A reformulation of the hot-spot temperature and areal density needed for ignition as a  $P_{\text{hs}}$  requirement is  $P_{\text{hs}} > 250 \text{ Gbar} / \sqrt{E_{\text{hs}}/10 \text{ kJ}}$ . Increasing laser coupling and  $E_{\text{hs}}$  reduces  $P_{\text{hs}}$  needed for ignition. Symmetric direct-drive-ignition target designs on the 1.8 MJ, 0.35  $\mu\text{m}$  NIF are predicted to couple up to 40 kJ to the hot spot, resulting in a required pressure of  $P_{\text{hs}} = 120 \text{ Gbar}$ , which can be achieved in an implosion with a convergence ratio  $\text{CR} = 22$ , and in-flight aspect ratio (IFAR)—defined as the shell radius divided by its thickness—of 24 when the energy coupling losses from CBET have been mitigated. Current OMEGA implosions reach  $E_{\text{hs}} = 0.44 \text{ kJ}$  without any CBET mitigation. When scaled to 1.8 MJ UV energy on the NIF, these OMEGA implosions are

predicted to reach  $E_{\text{hs}} \approx 30$  kJ, increasing the required  $P_{\text{hs}}$  to 144 Gbar. With this  $E_{\text{hs}}$  target designs with CR = 25 and an IFAR of 33 are required to reach the ignition conditions. Because of the higher  $E_{\text{hs}}$  for direct-drive ICF, the ignition-relevant  $P_{\text{hs}}$  and CR are lower than the requirements for indirect-drive ICF:  $P_{\text{hs}} = 350$  to 400 Gbar and CR = 30 to 40 [5]. An inferred  $P_{\text{hs}}$  of  $226 \pm 37$  Gbar has been reported for NIF indirect-drive ICF implosions [7].

The hydrodynamically scaled, direct-drive, DT-layered implosions are designed with the 1-D hydrodynamics code *LILAC* [20] to result in  $v_{\text{imp}} = 3.6$  to  $3.8 \times 10^7$  cm/s,  $\alpha = 2.5$  to 4.5, CR = 15 to 23, and IFAR = 15 to 25. *LILAC* includes a nonlocal electron thermal conduction model [21], a CBET model [16], and a new CH first-principles equation of state [22]. The 1-D simulations match the experimental observables throughout the implosion, including the scattered laser light energy and spectrum [23], shell trajectories [24], and neutron bang time [13].

The target and the laser drives used in this study are presented in Fig. 1. The target has a CD ablator with an 8  $\mu\text{m}$  thickness and an outside radius  $R = 430$   $\mu\text{m}$ . Typical target-positioning errors are 5 to 30  $\mu\text{m}$ . The DT-ice thickness was  $50 \pm 5$   $\mu\text{m}$ . The inner wall of the DT-ice layer has a 1- $\mu\text{m}$  rms smoothness, and a 49:51 D:T ratio with a hydrogen (H) content less than 0.1%. The original vapor region has 59:40 D:T ratio with  $\sim 1\%$  of H because of isotope fractionation during layering. Most of the targets were driven with 26 kJ of incident laser energy and had two-dimensional smoothing by spectral dispersion [25] and polarization smoothing [26] on the entire pulse. Each of the 60 beams used a phase plate to generate a super-Gaussian far-field intensity profile on

target with an order  $n = 4.4 \pm 0.1$  and 95% of the laser energy encircled within a diameter of  $825 \pm 5 \mu\text{m}$ .

$P_{\text{hs}}$  was inferred from x-ray and nuclear diagnostics assuming an isobaric hot spot [27]. The maximum neutron production rate is expressed as  $N_{\text{max}} = n_{\text{T}} n_{\text{D}} T^2 \int_{V_{\text{hs}}} dV (\langle \sigma v \rangle / T^2)$ , where  $n_{\text{D}}$  is the number density of deuterons,  $n_{\text{T}}$  is the number density of tritons,  $T$  is the ion temperature,  $\langle \sigma v \rangle$  is the DT fusion reactivity, and  $V_{\text{hs}}$  is the hot-spot volume. Fitting the neutron rate with a Gaussian function having a temporal width (FWHM) equal to  $\Delta t_{\text{burn}}$ ,  $N_{\text{max}}$  is related to the neutron yield  $Y$  as  $N_{\text{max}} = 2Y \sqrt{\ln 2 / \pi} / \Delta t_{\text{burn}}$ .  $P_{\text{hs}}$  is determined by combining these two expressions for  $N_{\text{max}}$  assuming a 50:50 D:T mixture in the hot spot giving  $P_{\text{hs}} \equiv \left\{ 32Y \sqrt{\ln 2 / \pi} / \left[ \Delta t_{\text{burn}} \int_{V_{\text{hs}}} dV (\langle \sigma v \rangle / T^2) \right] \right\}^{1/2}$ . The radius of the hot spot  $R_{\text{hs}}$  is inferred from the image of the hot spot recorded at stagnation in the 4 to 8 keV photon energy range with the 16-channel Kirkpatrick–Baez microscope having  $6\text{-}\mu\text{m}$  spatial resolution and 30-ps temporal resolution [12]. The hot-spot image for shot 77066 is shown in Fig. 2(a), and the measured and fitted intensity profiles taken along the dashed line through the center of the image are presented in Fig. 2(b). The 17% intensity contour radius  $R_{17}$  of the gated x-ray image is related to the  $R_{\text{hs}}$  based on 1-D simulations as  $R_{\text{hs}} = 1.06 R_{17}$ . Guided by hydrocode calculations, the ion temperature is assumed to have the radial dependence as  $T(r) = T_c \left[ 1 - (r/R_{\text{hs}})^2 (1 - 0.15^{3/2}) \right]^{2/3}$  with a maximum hot-spot temperature of  $T_c$ , which is constrained by the neutron-averaged ion temperature

inferred from the neutron time-of-flight (nTOF) diagnostic

$\langle T_i \rangle_n = \left[ \int V_{hs} dV (\langle \sigma v \rangle / T) / \int V_{hs} dV (\langle \sigma v \rangle / T^2) \right]$ .  $\langle T_i \rangle_n$  was inferred along three lines of sight using the technique outlined in Ref. 28, and the minimum  $\langle T_i \rangle_n$  value is taken to minimize the effects of residual kinetic energy in the hot spot [29]. The time of peak neutron production and  $\Delta t_{burn}$  were recorded with a measurement uncertainty of  $\pm 25$  ps and  $\pm 10\%$ , respectively [13].

A  $P_{hs} = 56 \pm 7$  Gbar was inferred for shot 77066 having the following measurements:  $Y = 4.1 \pm 0.2 \times 10^{13}$ ,  $\langle T_i \rangle_n = 3.2 \pm 0.25$  keV,  $R_{17} = 21.5 \pm 0.4$   $\mu\text{m}$ , and  $\Delta t_{burn} = 67 \pm 5$  ps. The compressed areal density  $\rho R$  is inferred from the down-scattered primary DT neutrons, and was diagnosed using an nTOF detector ( $\rho R_{nTOF} = 221 \pm 31$  mg/cm<sup>2</sup>) [30] and the magnetic recoil spectrometer ( $\rho R_{MRS} = 193 \pm 17$  mg/cm<sup>2</sup>) [31] along different lines of sight. The 1-D simulations were post-processed to predict the x-ray and nuclear quantities of the hot spot required to infer the  $P_{hs}$ ; the 1-D calculated  $P_{hs}$  at bang time is 90 Gbar. A comparison of the measured target performance and the 1-D simulations for implosions achieving  $P_{hs} > 50$  Gbar is presented in Table I. A generalized Lawson criterion without alpha heating [6, 15]

$\chi_{no\alpha} = P\tau / P\tau_{ign} = (\rho R_{no\alpha})^{0.61} (0.12 Y_{no\alpha}^{16} / M_{DT}^{stag})^{0.34}$  was calculated for shot 77066 and energy scaled  $(E_{laser}^{NIF} / E_{laser}^{OMEGA})^{0.35}$  from the OMEGA laser energy  $E_{laser}^{OMEGA} = 26$  kJ to the NIF laser energy  $E_{laser}^{NIF} = 1.9$  MJ [14, 15]. With a measured areal density of  $\rho R_{no\alpha} = 0.207$  g/cm<sup>2</sup> (average of  $\rho R_{nTOF}$  and  $\rho R_{MRS}$  measurements), a measured neutron yield in



units of  $10^{16}$  of  $Y_{no\alpha}^{16} = 4.1 \times 10^{-3}$ , and a 1-D calculated shocked DT mass at stagnation in units of mg of  $M_{DT}^{stag} = 12.3 \times 10^{-3}$  mg, the  $\chi_{no\alpha}(E_{laser}^{NIF}/E_{laser}^{OMEGA})^{0.35} \approx 0.6$ . As shown in Table II, similar performance was achieved with the single-picket and triple-picket laser drives. The direct-drive implosion performance achieved on OMEGA has been extrapolated to NIF: A detailed estimate of the fusion yield amplification due to alpha heating and the total fusion yield are presented in Ref. 15 for a NIF direct-drive ignition target.

Three-dimensional hydrodynamics simulations from the code *ASTER* [32] are used as a guide to determine possible sources of target performance degradation. When laser irradiation nonuniformity on target caused by 15% rms beam-to-beam laser power imbalance, 20- $\mu$ m target offset, and 10- $\mu$ m rms beam-to-beam laser-beam mispointing are included in the *ASTER* simulations, the low-mode distortion of the hot spot are predicted to rupture the shell before peak compression is reached [see Figs. 3(a) and 3(b)]. This reduces the compression leading to lower neutron production rate and  $P_{hs}$ . The effects of the 3-D perturbations on the neutron rate can be seen in Fig. 3(c) by comparing the 3-D curve with the 1-D curve, corresponding to a spherically symmetric 3-D implosion. The initial slope of the neutron rate is the similar for both cases until the 3-D case deviates from the 1-D case prior to the peak for a spherically symmetric implosion (1-D bang time). The 3-D perturbations cause the peak neutron rate to occur approximately 20 ps earlier with a peak neutron rate that is lower than the 1-D case. However, the simulated burnwidth (fwhm) is similar for 1-D and 3-D cases even though the neutron rate for the 3-D case deviates from the 1-D case [see Fig. 3(c)]. The ratio of

the yield for the 3-D simulation to the 1-D simulation is 20% and the ratio of the  $P_{\text{hs}}$  for the 3-D simulation to the 1-D simulation is 50%. The  $\langle T_i \rangle_n$  for the 3-D and 1-D simulations are similar at 2.90 keV and 3.04 keV, respectively. As can be seen in Table I,  $\langle T_i \rangle_n$ ,  $R_{17}$ , and  $\Delta t_{\text{burn}}$  are close to the 1-D simulated values, while the measured  $Y$  is 31-38% of the 1-D prediction, and the inferred  $P_{\text{hs}}$  is about half of the 1-D simulated value (see Table II). These observations are consistent with the trends from the symmetric and perturbed 3-D simulations (see Fig. 3) showing the low-mode distortion of the hot spot rupturing the shell around stagnation and limiting the compression and density of the hot spot.

A comparison of the measured neutron rate with the 1-D simulation is presented in Figs. 4(a) and 4(b) for  $\alpha \sim 3.7$  implosions having 804- $\mu\text{m}$  and 1017- $\mu\text{m}$  initial target diameters, respectively. The larger target is driven with 29 kJ of laser energy. The timing of the neutron rate is adjusted within the timing error (25 ps) of the neutron temporal diagnostic to match the slope of the rising edge of the neutron rate with the 1-D simulation. The deviation of the measured neutron rate from the 1-D simulated neutron rate is more pronounced for the larger target than the smaller one (see Fig. 4). A comparison of the measured and 1-D simulated neutron rates for the smaller and larger targets shows the initial measured slope of the neutron rate is more like the 1-D simulation for the smaller target and the ratio of the measured peak neutron rate to the 1-D value is twice as high for the smaller target (0.36 vs. 0.15). The low-mode distortion of the hot spot is expected to be more pronounced for the larger targets, since the calculated low-mode drive nonuniformity is higher for the larger target due to less beam overlap.

The larger downward excursion of the measured neutron rate from the simulated one for the larger target compared to the smaller target is attributed to the higher low-mode drive nonuniformity.

When the earlier peaking of the measured neutron rate relative to the 1-D simulated rate is taken into account the 1-D simulations for implosions with a CR < 17 and  $\alpha > 3.5$  are in closer agreement with the experimental values of  $P_{\text{hs}}$  and the compressed areal density. The ratio of the  $P_{\text{hs}}$  inferred from the experiment with the 1-D simulated  $P_{\text{hs}}$  averaged over the measured neutron rate is compared to the 1-D convergence ratio in Fig. 5(a), and shown to reach 90% of the 1-D value for CR < 17. This behavior is attributed to a higher level of low-mode distortion of the hot spot for  $\alpha > 3.5$  implosions having CR > 17. The measured areal density compared to the 1-D simulated areal density averaged over the measured neutron rate is presented in Fig. 5(b), and is shown to reach the 1-D value for  $\alpha > 3.5$ . The degraded performance for the lower-adiabat ( $\alpha < 3.5$ ) implosions is attributed to high-mode perturbations caused by laser imprint and mass modulations in the target.

## **Acknowledgments**

The authors acknowledge the excellent operation of the OMEGA laser system.

This material is based upon work supported by the DOE NNSA under Award Number DE-NA0001944, the University of Rochester, and the New York State Energy Research and Development Authority. The support of DOE does not constitute an endorsement by DOE of the views expressed in this article.

## References

- [1] J. D. Lindl *et al.*, Phys. Plasmas **11**, 339 (2004).
- [2] S. Atzeni and J. Meyer-ter-Vehn, *The Physics of Inertial Fusion: Beam Plasma Interaction, Hydrodynamics, Hot Dense Matter*, International Series of Monographs on Physics (Clarendon Press, Oxford, 2004).
- [3] R. Betti *et al.*, Phys. Plasmas **9**, 2277 (2002).
- [4] E. M. Campbell and W. J. Hogan, Plasma Phys. Control. Fusion **41**, B39 (1999).
- [5] O. A. Hurricane *et al.*, Nature **506**, 343 (2014).
- [6] R. Betti *et al.*, Phys. Rev. Lett. **114**, 255003 (2015).
- [7] T. Döppner *et al.*, Phys. Rev. Lett. **115**, 055001 (2015).
- [8] T. J. B. Collins *et al.*, Phys. Plasmas **19**, 056308 (2012).
- [9] V. N. Goncharov *et al.*, Phys. Rev. Lett. **104**, 165001 (2010).
- [10] T. R. Boehly *et al.*, Opt. Commun. **133**, 495 (1997).
- [11] V. N. Goncharov *et al.*, Phys. Plasmas **21**, 056315 (2014).
- [12] F. J. Marshall, Rev. Sci. Instrum. **83**, 10E518 (2012).
- [13] C. Stoeckl *et al.*, Rev. Sci. Instrum. **87**, 053501 (2016).
- [14] R. Nora *et al.*, Phys. Plasmas **21**, 056316 (2014).
- [15] A. Bose *et al.*, “Core conditions for alpha heating attained in direct-drive inertial confinement fusion,” *Physical Review E* (in press).
- [16] I. V. Igumenshchev *et al.*, Phys. Plasmas **17**, 122708 (2010); I. V. Igumenshchev *et al.*, Phys. Plasmas **19**, 056314 (2012); D. H. Froula *et al.*, Phys. Rev. Lett. **108**, 125003 (2012).
- [17] C.J. Randall and J. R. Albritton, Phys. Fluids **24**, 1474 (1981).

- [18] P. B. Radha *et al.*, Phys. Plasmas **23**, 056305 (2016).
- [19] W. L. Kruer, in *The Physics of Laser Plasma Interactions*, Frontiers in Physics, Vol. 73, edited by D. Pines (Addison-Wesley, Redwood City, CA, 1988).
- [20] J. Delettrez *et al.*, Phys. Rev. A **36**, 3926 (1987).
- [21] V. N. Goncharov *et al.*, Phys. Plasmas **15**, 056310 (2008).
- [22] S. X. Hu *et al.*, Phys. Rev. E **92**, 043104 (2015).
- [23] W. Seka *et al.*, Phys. Plasmas **15**, 056312 (2008).
- [24] D. T. Michel *et al.*, Phys. Rev. Lett. **114**, 155002 (2015).
- [25] S. Skupsky *et al.*, J. Appl. Phys. **66**, 3456 (1989); S. P. Regan *et al.*, J. Opt. Soc. Am. B **22**, 998 (2005).
- [26] T. R. Boehly *et al.*, J. Appl. Phys. **85**, 3444 (1999).
- [27] C. Cerjan, P. T. Springer, and S. M. Sepke, Phys. Plasmas **20**, 056319 (2013); R. Betti *et al.*, Phys. Plasmas **17**, 058102 (2010).
- [28] T. J. Murphy, R. E. Chrien, and K. A. Klare, Rev. Sci. Instrum. **68**, 610 (1997).
- [29] T. J. Murphy, Phys. Plasmas **21**, 072701 (2014).
- [30] C. J. Forrest *et al.*, Rev. Sci. Instrum. **83**, 10D919 (2012).
- [31] J. A. Frenje *et al.*, Phys. Plasmas **17**, 056311 (2010).
- [32] I. V. Igumenshchev *et al.*, Phys. Plasmas **23**, 052702 (2016).

**Table I.** Compilation of measured  $Y$ ,  $\langle T_i \rangle_n$ ,  $R_{17}$ ,  $\Delta t_{\text{burn}}$  and  $\rho R$  for shots with a  $P_{\text{hs}} > 50$  Gbar. Quantities in parentheses are 1-D simulated values. First (second)  $\rho R$  measurement is diagnosed with nToF (MRS).

Shot	$Y$ ( $\times 10^{13}$ )	$\langle T_i \rangle_n$ (keV)	$R_{17}$ ( $\mu\text{m}$ )	$\Delta t_{\text{burn}}$ (ps)	$\rho R$ (mg/cm <sup>2</sup> )
77064	4.2 $\pm$ 0.2 (11.0)	3.3 $\pm$ 0.25 (3.3)	22.0 $\pm$ 0.5 (21.0)	62 $\pm$ 6 (62)	211 $\pm$ 30, 191 $\pm$ 17 (216)
77066	4.1 $\pm$ 0.2 (13.1)	3.2 $\pm$ 0.25 (3.4)	21.5 $\pm$ 0.4 (22.4)	67 $\pm$ 5 (60)	221 $\pm$ 31, 193 $\pm$ 17 (211)
77068	5.3 $\pm$ 0.3 (15.0)	3.6 $\pm$ 0.25 (3.6)	22.0 $\pm$ 0.5 (19.5)	66 $\pm$ 6 (55)	211 $\pm$ 30, 194 $\pm$ 17 (245)
77070	4.0 $\pm$ 0.2 (11.8)	3.3 $\pm$ 0.25 (3.4)	20.4 $\pm$ 0.4 (19.0)	70 $\pm$ 5 (57)	220 $\pm$ 31, 229 $\pm$ 19 (243)

**Table II.** Compilation of the laser drive,  $\alpha$ , shocked DT mass at stagnation  $M_{\text{DT}}^{\text{stag}}$ ,  $P_{\text{hs}}$ (1-D),  $P_{\text{hs}}$ (expt.),  $P_{\text{hs}}$ (expt.)/ $P_{\text{hs}}$ (1-D), and the energy-scaled  $\chi_{\text{no}\alpha}$  for the shots with a  $P_{\text{hs}} > 50$  Gbar.

shot	laser drive	$\alpha$	$M_{\text{DT}}^{\text{stag}}$ mg	$P_{\text{hs}}$ (1-D) Gbar	$P_{\text{hs}}$ (expt.) Gbar	$P_{\text{hs}}$ (expt.)/ $P_{\text{hs}}$ (1-D)	$\chi_{\text{no}\alpha} (E_{\text{laser}}^{\text{NIF}}/E_{\text{laser}}^{\text{OMEGA}})^{0.35}$
77064	triple picket	3.7	0.0116	91	54 $\pm$ 7	59%	0.59
77066	triple picket	3.2	0.0123	90	56 $\pm$ 7	62%	0.58
77068	single picket	3.2	0.0112	119	56 $\pm$ 7	47%	0.64
77070	single picket	3.6	0.0107	110	56 $\pm$ 7	51%	0.63

## Figure Captions

FIG. 1. (color online) (a) Schematic of an OMEGA direct-drive DT-layered target. (b) The measured laser power for single- and triple-picket drives.

FIG. 2. (color online) (a) The measured time-resolved, x-ray image of the hot spot recorded at stagnation in the 4 to 8 keV photon energy range by a 16-channel Kirkpatrick–Baez microscope. (b) The measured and fitted intensity profiles taken through the center of the x-ray image along the dashed line in (a).

FIG. 3. (color online) *ASTER* simulations of the hot-spot near stagnation. (a) Mass-density contour taken at earlier time; (b) mass-density contour taken at later time; and (c) 3-D calculated neutron rate relative to the calculated neutron rate for a spherically symmetric implosion (1-D).

FIG. 4. (color online) Measured and 1-D simulated neutron rates for  $\alpha = 3.7$  to  $3.8$  implosions having initial target diameter of (a)  $804\ \mu\text{m}$  and (b)  $1017\ \mu\text{m}$ .

FIG. 5. (color online) (a) The ratio of measured  $P_{\text{hs}}$  to 1-D simulated  $P_{\text{hs}}$  averaged over the measured neutron rate ( $P_{\text{n, exp}} / P_{\text{n, 1-D}}$ ) versus the 1-D simulated convergence ratio calculated at the experimental neutron bang time and (b) the ratio of measured  $\rho R$  to 1-D  $\rho R$  averaged over the measured neutron rate ( $\langle \rho R \rangle_{\text{n, exp}} / \langle \rho R \rangle_{\text{n, 1-D}}$ ) for targets having outside diameters (OD) ranging from 800 to  $1000\ \mu\text{m}$  versus the calculated shell adiabat.



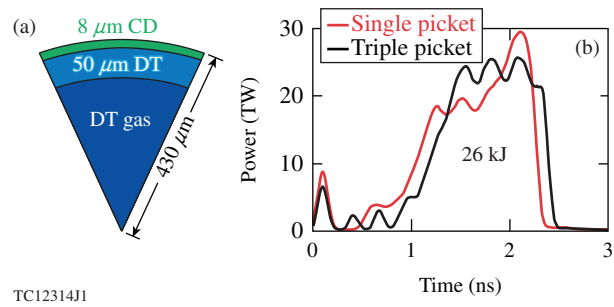


Figure 1 LM14783 13JUN2016




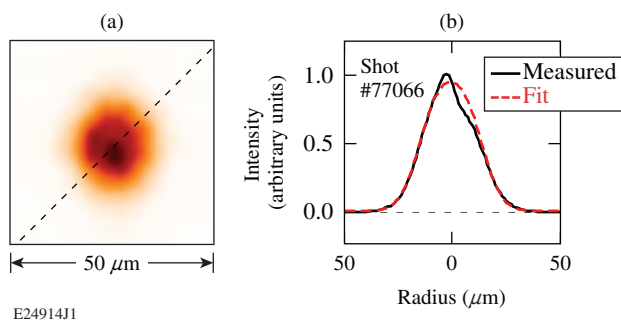


E24914J1

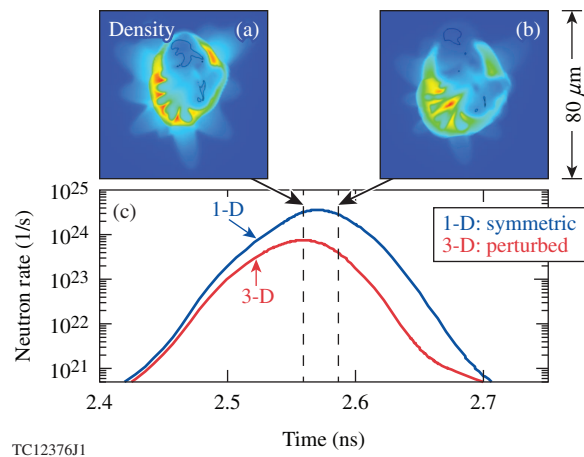

TC12376J1

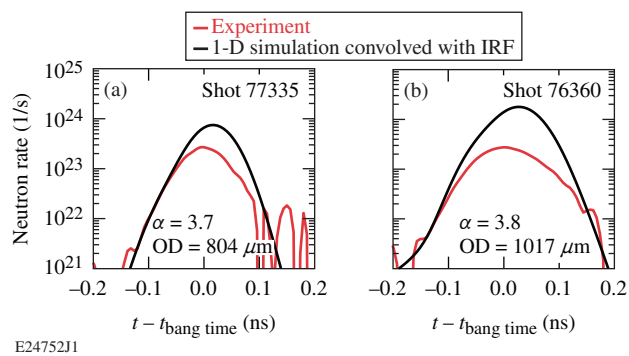

E24752J1

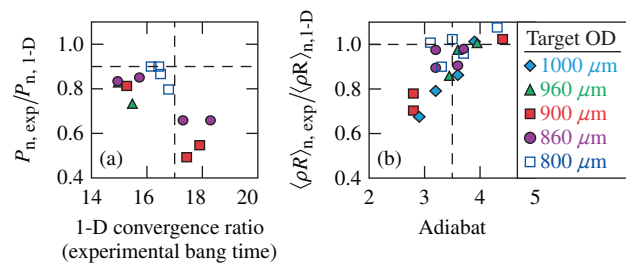

TC12326J1