



CHORUS

This is the accepted manuscript made available via CHORUS. The article has been published as:

Optically Heralded Entanglement of Superconducting Systems in Quantum Networks

Stefan Krastanov, Hamza Raniwala, Jeffrey Holzgrafe, Kurt Jacobs, Marko Lončar, Matthew J. Reagor, and Dirk R. Englund

Phys. Rev. Lett. **127**, 040503 — Published 22 July 2021

DOI: [10.1103/PhysRevLett.127.040503](https://doi.org/10.1103/PhysRevLett.127.040503)

Optically-Heralded Entanglement of Superconducting Systems in Quantum Networks

Stefan Krastanov,^{1,2} Hamza Raniwala,¹ Jeffrey Holzgrafe,² Kurt Jacobs,^{3,4} Marko Lonar,² Matthew J. Reagor,⁵ and Dirk R. Englund^{1,6}

¹*Department of Electrical Engineering and Computer Science, Massachusetts Institute of Technology, Cambridge, MA 02139, USA*

²*John A. Paulson School of Engineering and Applied Sciences, Harvard University, Cambridge, MA 02138, USA*

³*U.S. Army Research Laboratory, Computational and Information Sciences Directorate, Adelphi, MD 20783, USA*

⁴*Department of Physics, University of Massachusetts at Boston, Boston, MA 02125, USA*

⁵*Rigetti Computing, 775 Heinz Ave, Berkeley CA 94710, USA*

⁶*Research Laboratory of Electronics, Massachusetts Institute of Technology, Cambridge, MA 02139, USA*

(Dated: June 22, 2021)

Networking superconducting quantum computers is a longstanding challenge in quantum science. The typical approach has been to cascade transducers: converting to optical frequencies at the transmitter and to microwave frequencies at the receiver. However, the small microwave-optical coupling and added noise have proven formidable obstacles. Instead, we propose optical networking via heralding end-to-end entanglement with one detected photon and teleportation. This new protocol can be implemented on standard transduction hardware, while providing significant performance improvements over transduction. In contrast to cascaded direct transduction, our scheme absorbs the low optical-microwave coupling efficiency into the heralding step, thus breaking the rate-fidelity trade-off. Moreover, this technique unifies and simplifies entanglement generation between superconducting devices and other physical modalities in quantum networks.

A central challenge in quantum information science is to transfer quantum states between superconducting systems over long distances. The most widely investigated approach is microwave-optical (M-O) quantum state transduction [1–23]. However, despite concerted effort in direct M-O transduction, it remains challenging to achieve a high transduction efficiency without adding significant noise [24]. Moreover, these problems are compounded because a full state transfer between two quantum devices requires sequential M-O and O-M transduction steps [25]. Here, we propose to replace these M-O-M steps with one round of optically heralded M-M entanglement, followed by state teleportation. In contrast to direct transduction, this photon-heralded entanglement scheme favors low M-O coupling efficiency to eliminate added noise, while assuring on-demand state teleportation by heralding and distilling M-M Bell pairs faster than their decoherence rates. Specifically, for present-day technology, we estimate entanglement rates exceeding 100kHz per channel, an entanglement fidelity exceeding 0.99, and the potential for entanglement purification to reach a fidelity of 0.999 on present-day hardware. Our approach unifies and simplifies entanglement generation between superconducting devices and other physical modalities in quantum networks, including trapped ions, cold atoms, solid-state spin systems, or another traveling photon (corresponding to heralded M-O quantum state transduction). Crucially, our protocol does not require the creation of new hardware: we show that today’s transduction hardware can run our heralding scheme while providing orders of magnitude improvement in the networking fidelity compared to the typical deterministic transduction.

Quantum networks were proposed to transfer quan-

tum information between distant cold atoms memories via optical links [26], and they now underpin numerous proposed applications [27]. To connect superconducting systems across such networks, a number of different microwave-to-optical transduction technologies are being investigated [28], including optomechanics [1–9, 11, 22, 23], neutral atoms [10, 12] and rare-earth-doped crystals [13–15], diamond color centers [29], and electro-optic transducers [16–21, 30–33]. A critical requirement in these approaches is to optimize conversion efficiency and to minimize added noise, but achieving both simultaneously is extremely challenging. Recently proposed heralded transduction from a microwave *to an optical photon* by heralding on a microwave Bell pair may help [25, 34], but two such transduction steps would still be necessary for end-to-end state transfer, entailing high overhead. Alternatively, microwave transduction to proximal diamond color center spins has been proposed for high-speed and high-fidelity quantum network teleportation, but efficient coupling between a single spin and microwave photon has not yet been shown. By contrast, we propose a single-step, optically-heralded scheme for entanglement of two distant superconducting qubits via electro-optic parametric frequency conversion [32], based on the well-known Duan, Lukin, Cirac, and Zoller proposal [35].

Such a heralded entanglement scheme can be performed using many different MO transduction platforms, but electro-optic transducers are particularly promising for this application. Direct electro-optic transduction provides a wide transduction bandwidth (limited only by the microwave lifetime) that enables high-rate entanglement generation even in the low MO coupling regime. Furthermore, recent work has shown that electro-optic transducers can operate with low noise even under op-

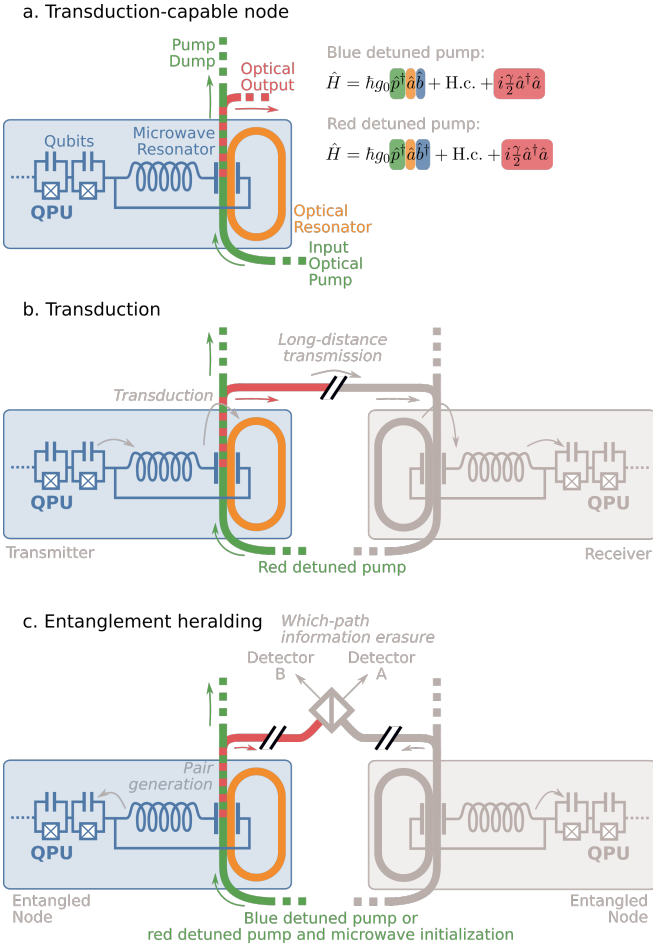


FIG. 1. (a) A typical transducer, using a $\chi^{(2)}$ process whereby a classical pump enables a beam-splitter or two-mode squeezer between an optical mode and a microwave mode. (b) If the pump is red-detuned from the optical mode it enables a beam-splitter interaction which can transduce a microwave state into an optical state. This is a deterministic, but low-fidelity operation. (c) If the pump is blue-detuned it will create pairs of microwave/optical photons. By detection of the optical photons after erasing the path information we can herald entanglement between the microwave oscillators. This is a high-fidelity, low-efficiency probabilistic operation.

tical pumps exceeding $1 \mu\text{W}$ [18, 20, 36]. The noise in electro-optic transducers is reduced due to their physical separation of optic and microwave modes, the low thermal resistance provided by their relatively large size and non-suspended structure, and their lack of low-frequency intermediate states.

A typical electro-optic transducer uses a $\chi^{(2)}$ nonlinear interaction between a classical optical pump mode \hat{p} , an optical mode \hat{a} , and a microwave mode \hat{b} [16, 17, 21, 33], as illustrated in Fig. 1.a. The classical mode is red-detuned with respect to \hat{a} leading to the Hamiltonian

$$\hat{H} = \hbar g_0 \hat{p}^\dagger \hat{a}^\dagger \hat{b} + \text{H.c.}, \quad (1)$$

where g_0 is the single-photon nonlinear interaction rate.

The \hat{p} mode is classical and can be replaced by $\langle n_p \rangle$, the average number of photons in the mode. This leads to a beamsplitter-type Hamiltonian $\hat{a}^\dagger \hat{b} + \text{H.c.}$ that can be used for deterministic transduction, but its fidelity is low in practice due to the relatively low value of $g_0 \sim 1\text{kHz}$ compared to the optical loss rates in the system.

If the pump mode \hat{p} is instead blue-detuned the result is two-mode squeezing. This interaction will generate pairs of optical and microwave photons via spontaneous parametric down-conversion (SPDC) [33, 37–39]:

$$\hat{H} = \hbar g \hat{a} \hat{b} + \text{H.c.}, \quad (2)$$

$$g = g_0 \sqrt{\langle n_p \rangle}. \quad (3)$$

In either case the pump power, P , is related to the number of photons in the pump mode as

$$\langle n_p \rangle = \frac{4\gamma_e}{(\gamma_e + \gamma_i)^2} \frac{P}{\hbar\omega}, \quad (4)$$

where γ_e is the extrinsic loss rate of the optical mode and γ_i is its intrinsic loss rates. Throughout the majority of this letter we assume the γ_e and γ_i couplings are the same for the \hat{a} and \hat{p} modes.

If we couple the optical mode to a waveguide ending with a photodetector, this SPDC process allows us to herald the production of a single microwave photon by detecting a single optical photon. First, we will explore the performance of this procedure, and then we will examine how it enables the heralding of entanglement between two remote microwave systems. Lastly, while the blue-detuned pump is the more natural method for heralded operation, we will also explore an improved way to perform the heralding, which goes back to the use of a red-detuned pump and provides protection against certain errors.

The collapse operator that describes the detection of the optical photon is $\hat{c} = \sqrt{\gamma_e} \hat{a}$, which leads to a stochastic master equation with non-Hermitian effective Hamiltonian given by [40–42]

$$\hat{H} = \hbar g \hat{a} \hat{b} + \text{H.c.} + i \hbar \frac{\gamma_e}{2} \hat{a}^\dagger \hat{a}. \quad (5)$$

We will initially assume that the intrinsic loss rate γ_i is negligible, so that all photons are output into the waveguide at rate γ_e (non-zero γ_i will reduce the detection efficiency but not the fidelity). The total loss rate $\gamma = \gamma_i + \gamma_e$ is typically much larger than g , which simplifies the dynamics. While this hardware constraint leads to limited fidelity even in state-of-the-art transduction devices [17], in the heralding protocol we describe it is essential to obtaining high fidelity. This is because $\gamma \gg g$ is required to ensure that the SPDC process does not populate the cavity mode with more than one photon at any time. It does, however, limit the rate of photon generation. The lifetime of the microwave oscillator is orders of magnitude longer than the characteristic times of the dynamics studied here and so we take it to be infinite in our initial

analysis [43]. Once the heralded state is prepared in the microwave mode, we swap it into one of the qubits of the superconducting quantum processing unit (QPU) - a nonlinear operation at which transmon-based devices are becoming very capable.

We will denote a Fock state with n_a photons in optical mode \hat{a} and n_b in microwave mode \hat{b} as $|n_a n_b\rangle$. To obtain a $|11\rangle$ pair on which we can herald the single microwave photon we simply pump the system. A click on the detector heralds the creation of single photon in the microwave mode (a correct approximation as long as $g \ll \gamma_e$). Accounting for the $\frac{\gamma_e}{\gamma_e + \gamma_i}$ drop in efficiency when $\gamma_i \neq 0$ gives a rate of photon generation under a continuous pump of

$$r_0 = \frac{4g_0^2 \langle n_p \rangle \gamma_e}{(\gamma_e + \gamma_i)^2}, \quad (6)$$

which gives $r_0 \approx \langle n_p \rangle 10^{-2} \text{Hz}$ at typical $g_0 = 1 \text{kHz}$ and $\gamma_e = \gamma_i = 100 \text{MHz}$.

The easiest way to derive this form for r_0 is to restrict oneself to the space spanned by $\{|00\rangle, |11\rangle\}$. For a state $|\psi\rangle = c_0|00\rangle + c_1|11\rangle$ we get the following ODE:

$$\begin{pmatrix} \dot{c}_0 \\ \dot{c}_1 \end{pmatrix} = \begin{pmatrix} 0 & -ig \\ -ig^* & -\frac{\gamma_e}{2} \end{pmatrix} \begin{pmatrix} c_0 \\ c_1 \end{pmatrix} \quad (7)$$

which leads to

$$\begin{pmatrix} c_0 \\ c_1 \end{pmatrix} = e^{-\frac{\gamma_e}{4}t} \begin{pmatrix} \frac{\gamma_e}{4g'} \sinh(g't) + \cosh(g't) \\ -i\frac{g}{g'} \sinh(g't) \end{pmatrix}, \quad (8)$$

$$g' = \sqrt{\frac{\gamma_e^2}{4} - |g|^2}. \quad (9)$$

The stochastic master equation tells us that the probability that the photon remains undetected at time t is

$$\langle \psi(t) | \psi(t) \rangle \sim e^{(2g' - \frac{\gamma_e}{2})t} \sim e^{-\frac{4|g|^2}{\gamma_e}t}, \quad (10)$$

which indeed corresponds to a Poissonian detection process with rate r_0 .

If we use the same coherent pump to drive two separate copies of this system and erase the which-path information using a beam splitter (Fig. 1.c), we will herald the generation of the distributed microwave Bell pair $|01\rangle \pm |10\rangle$ [35]. If the two nodes are mismatched and not calibrated, hence having different interaction rates g and couplings γ_e , the pair would look like $c_{1l}|01\rangle \pm c_{1r}|10\rangle$, where c_{1l} and c_{1r} are the coefficients for the left and right network nodes as defined in Eq. 8.

The rate at which these Bell pairs would be generated is

$$r_e = 2r_0 e^{-r_0 \Delta t} \frac{\Delta t}{\Delta t + t_r}, \quad (11)$$

where $r_0 \Delta t e^{-r_0 \Delta t}$ is the probability for a Poissonian single-click event during the interval Δt (the duration of each pump pulse). The factor of 2 comes from the fact that either of the two nodes can produce a heralded

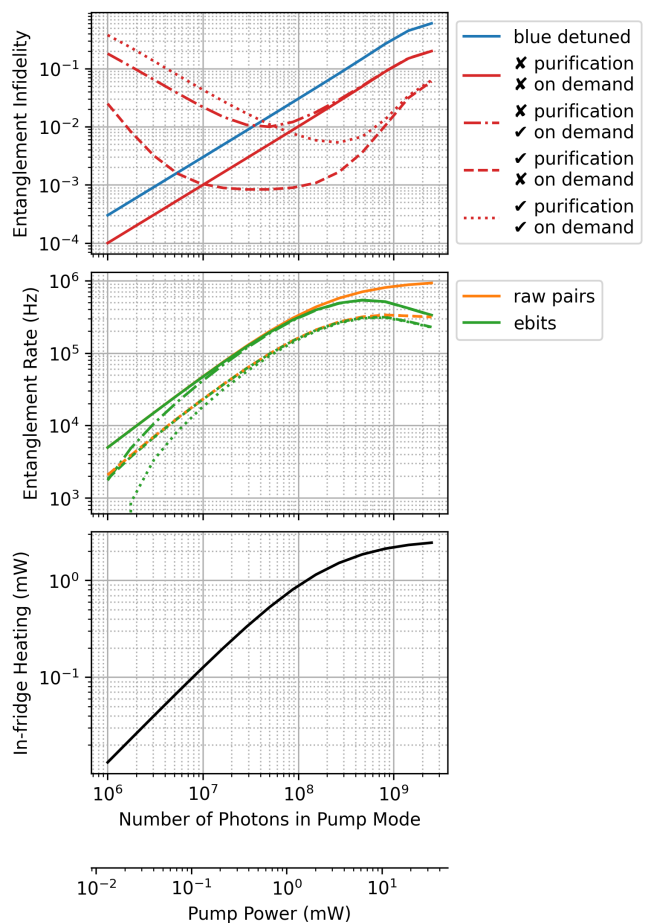


FIG. 2. **In the top figure** we see the infidelity of the obtained microwave Bell pair in different regimes. The blue-detuned “squeezing” implementation has higher infidelity due to populating higher-than-one-photon states (blue line). The red-detuned “beam splitter” implementation requires preparing the microwave resonator in the $|1\rangle$ state but does not suffer from the aforementioned excitations. We further investigate the red-detuned approach followed by purification and/or storage for on-demand use (red lines). Besides the $\sim \frac{g}{\gamma}$ infidelity in the solid lines, we see that storage at low generation rates causes an infidelity floor, due to finite microwave lifetime. **The middle figure** takes all red-detuned regimes from the top plot and presents their rates of entanglement generation (orange lines) and rate of equivalent ebit generation, i.e., the hashing yield [44] (green lines). **The bottom figure** gives the in-fridge heating due to the intrinsic loss of the optical resonator. Evaluated at $g_0 = 1 \text{kHz}$, $\gamma_e = \gamma_i = 100 \text{MHz}$, microwave loss $\gamma_{\text{MW}} = 1 \text{kHz}$, pump wavelength $\lambda_p = 1500 \text{nm}$, microwave gate fidelity 0.999, and microwave resonator reset time of $1 \mu\text{s}$ (state of the art values [17, 32, 43]).

photon. Lastly, the overall rate is lowered, proportional to the duty cycle due to the finite t_r – the time necessary for reset of the microwave cavity after each attempt (typically on the order of $1 \mu\text{s}$ [43]). Throughout the figures in this manuscript we report the maximal value of r_e after optimizing with respect to Δt . The probability of

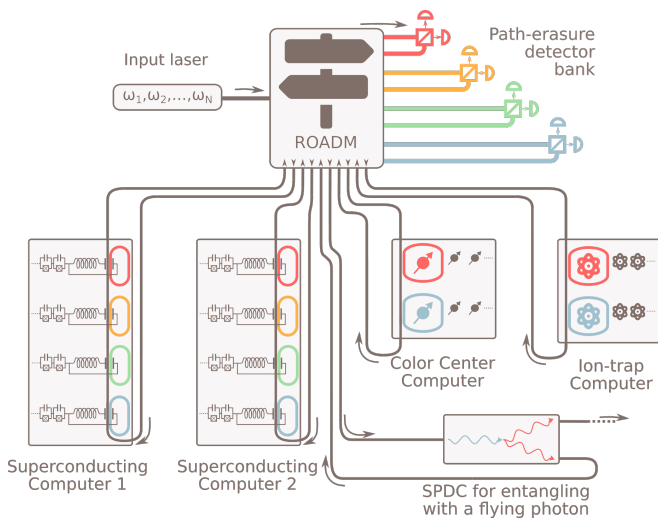


FIG. 3. Future outlook for inter-fridge connectivity. Replacing the single path-erasure detection with a reconfigurable optical add-drop multiplexer (ROADM) will allow us to route a frequency comb pump laser to qubits in several quantum nodes. By connecting the ROADM to a bank of path-erasure detectors for each frequency channel, this design will enable multiplexed heralded entanglement generation between multiple fridges of different quantum modalities.

more than one event during the interval Δt is generally negligible but can lead to infidelities in this protocol at high entanglement rates.

The performance of the above method for heralding Bell-pairs is depicted in Fig. 2. As already discussed, with an internal loss rate γ_i the rate of entanglement generation will be reduced by a factor of $\frac{\gamma_e}{\gamma_e + \gamma_i}$, while the fidelity of the obtained Bell pair is unaffected. Additionally, this heralded scheme ensures the fidelity is unchanged by insertion loss in the optical network (for example due to fiber-transducer coupling losses) [35], although such losses may require higher in-cryostat optical pump power. Outside of the regime $g \ll \gamma$ this fidelity would be degraded for two reasons: on one hand, the SPDC process will excite states that contain more than one photon; on the other hand, there will be a small probability, $\frac{c_1^2}{|c_0|^2 + |c_1|^2}$, that the SPDC will simultaneously produce a photon in each of the two resonators. Both of these infidelities scale as $\frac{g}{\gamma}$. While the second source of infidelity is unavoidable, the first can be eliminated in the following way: instead of a blue-detuned pump, we can employ the traditional red-detuned pump used in transduction together with a particular state preparation procedure in the microwave hardware. When we reset the microwave cavity we will prepare it in the state $|1\rangle$ instead of the ground state (a high-fidelity operation for modern microwave hardware [43]). This leads to the same ODE as seen in Eq. 8, however the basis for the evolving state is now $|\psi\rangle = c_0|01\rangle + c_1|10\rangle$. Given that this Hamiltonian preserves the total photon number, it cannot excite states outside of the $\{|01\rangle, |10\rangle\}$ sub-

space. The same protection against multi-photon states can be achieved by keeping the blue-detuned version of the Hamiltonian and using a strongly anharmonic microwave resonator that suppresses the two-photon excitation. As seen in Fig. 2, the elimination of unwanted multi-photon states leads to a notable increase of fidelity. Since the two resonators may still generate photons simultaneously, the residual infidelity scales as $\frac{g}{\gamma}$. The blue-detuned approach leads to a microwave entangled pair $|01\rangle \pm |10\rangle$, while in the red-detuned case with state preparation we herald a $|00\rangle \pm |11\rangle$ pair.

We estimate that typical hardware parameters of state-of-the-art devices ($\gamma_e = \gamma_i = 100\text{MHz}$ and $g_0 = 1\text{kHz}$ in [17, 43]) will allow pair generation rates of 100kHz at fidelities of 0.99, while suffering 0.1mW of in-fridge heating due to leakage from the pump. The infidelity can be lowered by an order of magnitude while incurring a decrease in the rate of just over a factor of two by performing simple entanglement purification [44, 45].

The entanglement rate scales as $\frac{\gamma_e^2}{(\gamma_e + \gamma_i)^4}$, which is maximal at $\gamma_e = \gamma_i$. Therefore, for a fixed pump power and in-fridge heating, the entanglement generation rate is proportional to γ_e^{-2} . The fraction of generated photons that reach the photodetector is only $\frac{\gamma_e}{\gamma_e + \gamma_i} = 50\%$, thus we have to reset the microwave cavity after each attempt, a delay of $\sim 1\mu\text{s}$ that limits the maximal rate as seen in the rate plot in Fig. 2.

In summary, at high entanglement rates (high pump powers) the fidelity of entanglement suffers due to undesired excitations in the non-heralded cavity, while at low rates the fidelity suffers due to the need to store the entangled pair for a long time in the microwave resonator. If we want higher rates of entanglement generation we can counteract the fidelity drop by performing purification. Longer-term, orders of magnitude improvement in entanglement rate or power requirements are possible through improvements in the resonator quality factor, thanks to the quadratic dependence on γ_e .

Optical pump light can produce microwave noise by direct absorption in the microwave resonator or heating the transducer node – a key challenge for all MO transducer platforms. Several techniques can be used to reduce the effects of thermal noise in our proposed system, including light shielding [46] and immersion in a liquid helium coolant [16]. Additionally, the microwave-optical transducer can be physically connected to a 1K stage, while radiatively overcoupling the microwave cavity mode to a thermal bath at 10mK, as proposed in previous works [25, 34, 47]. This allows the transducer to use the greater cooling power of a 1K stage while the noise is dominated by that of the colder stage. Alternatively, larger-scale custom cryostats for low-background experiments [48, 49] have shown the requisite cooling power at 100mK.

System-integration constraints – such as the desire to operate the QPU with minimal pump-light interference – could require physical separation within the cryostat between the transducer node we describe here and the main

QPU. In this case, an additional pitch-and-catch transfer [50–53] of the microwave Bell state would be required. Losses during this transfer would reduce fidelity, but recent work on high-efficiency pitch-and-catch schemes suggests this loss can be made small. Dark counts due to leakage from the pump can lower the fidelity, but modern designs do not suffer from this problem (discussed in the supplementary materials which includes Refs. [45, 54–57]).

The scheme described here extends naturally to heralding entanglement between a diverse set of quantum devices. On one hand, we can multiplex the entanglement heralding over multiple frequency channels, thus improving the entanglement generation rate. We can also use the method to entangle different quantum modalities (see Fig. 3). For example, entangling a superconducting device (where the pump, under a $\chi^{(2)}$ interaction, creates a state $|00\rangle + \varepsilon|11\rangle$) and a trapped ion device (where a conditional reflection of an attenuated pump from a $|+\rangle$ ion state creates a state $|0+\rangle + \varepsilon|1-\rangle$) in which after path erasure we obtain the entangled microwave-ion pair $|0+\rangle \pm |1-\rangle$. We can also herald the entanglement of the microwave cavity with a flying photon: one of the nodes is of the architecture discussed up to here, while the other node uses the pump in an SPDC photon pair generation experiment calibrated to have the same generation rate. In other words one of the nodes can employ a microwave-optical $\chi^{(2)}$ process while the other node employs a purely optical $\chi^{(2)}$ process, leading to heralding the entanglement of a microwave qubit and a flying optical qubit (in the single-rail basis).

As mentioned earlier in this letter, the quantum networking community has explored transduction through heralding over optical-microwave two-mode-squeezing and entanglement before [25, 30, 34, 58]. However, these schemes generally provide for the transduction or teleportation of a microwave state into an optical state or the same in the reverse direction. In our approach, while

the hardware is virtually the same, the quantum information of interest is never truly carried by an optical mode, rather the optics is used only for the direct entanglement of two microwave modes.

In conclusion, we have proposed a method of heralded entanglement generation between remote microwave photons. Our scheme relies on SPDC using previously demonstrated electro-optic transducers tuned to the low-coupling regime, such that low-efficiency generation of a microwave- and optical-photon pair is the primary transduction process. We have shown that, by heralding the optical photons from two QPUs, we can entangle the accompanying microwave photons remaining in each microwave cavity. Hence, our scheme allows for high-fidelity entanglement in the same hardware used today for low-fidelity transduction. We further demonstrate how to scale our proposed architecture to connect multiple QPUs across several quantum modalities. We believe this entanglement procedure will be valuable for the on-demand, multiplexed entanglement necessary for a quantum network.

ACKNOWLEDGMENTS

We thank Liang Jiang, Marc Davis, Saikat Guha, Michael Fanto, Matthew LaHaye, and Lamia Ateshian for helpful discussions. The Python and Qutip open source communities provided invaluable research software. SK and HR are grateful for the funding provided by the MITRE Quantum Moonshot Program. KJ acknowledges support from a DEVCOM Army Research Laboratory ECI grant. HR acknowledges support from the NSF Center for Ultracold Atoms. JH, ML, and MR acknowledge support from AFRL. JH, DE, and ML acknowledge support from NSF.

-
- [1] K. Stannigel, P. Rabl, A. S. Sørensen, P. Zoller, and M. D. Lukin, Optomechanical transducers for long-distance quantum communication, *Phys. Rev. Lett.* **105**, 220501 (2010).
 - [2] A. H. Safavi-Naeini and O. Painter, Proposal for an optomechanical traveling wave phonon–photon translator, *New Journal of Physics* **13**, 013017 (2011).
 - [3] L. Tian, Adiabatic state conversion and pulse transmission in optomechanical systems, *Phys. Rev. Lett.* **108**, 153604 (2012).
 - [4] Y.-D. Wang and A. A. Clerk, Using interference for high fidelity quantum state transfer in optomechanics, *Phys. Rev. Lett.* **108**, 153603 (2012).
 - [5] J. Bochmann, A. Vainsencher, D. D. Awschalom, and A. N. Cleland, Nanomechanical coupling between microwave and optical photons, *Nature Physics* **9**, 712 (2013).
 - [6] T. Bağcı, A. Simonsen, S. Schmid, L. G. Villanueva, E. Zeuthen, J. Appel, J. M. Taylor, A. Sørensen, K. Usami, A. Schliesser, *et al.*, Optical detection of radio waves through a nanomechanical transducer, *Nature* **507**, 81 (2014).
 - [7] R. W. Andrews, R. W. Peterson, T. P. Purdy, K. Cicak, R. W. Simmonds, C. A. Regal, and K. W. Lehnert, Bidirectional and efficient conversion between microwave and optical light, *Nature Physics* **10**, 321 (2014).
 - [8] L. Tian, Optoelectromechanical transducer: Reversible conversion between microwave and optical photons, *Annalen der Physik* **527**, 1 (2015).
 - [9] K. C. Balram, M. I. Davanço, J. D. Song, and K. Srinivasan, Coherent coupling between radiofrequency, optical and acoustic waves in piezo-optomechanical circuits, *Nature Photonics* **10**, 346 (2016).
 - [10] B. T. Gard, K. Jacobs, R. McDermott, and M. Saffman, Microwave-to-optical frequency conversion using a cesium atom coupled to a superconducting resonator, *Phys.*

- Rev. A **96**, 013833 (2017).
- [11] A. P. Higginbotham, P. Burns, M. Urmey, R. Peterson, N. Kampel, B. Brubaker, G. Smith, K. Lehnert, and C. Regal, Harnessing electro-optic correlations in an efficient mechanical converter, *Nature Physics* **14**, 1038 (2018).
- [12] J. P. Covey, A. Sipahigil, and M. Saffman, Microwave-to-optical conversion via four-wave mixing in a cold ytterbium ensemble, *Physical Review A* **100**, 012307 (2019).
- [13] J. G. Bartholomew, J. Rochman, T. Xie, J. M. Kindem, A. Ruskuc, I. Craiciu, M. Lei, and A. Faraon, On-chip coherent microwave-to-optical transduction mediated by ytterbium in yvo 4, *Nature communications* **11**, 1 (2020).
- [14] S. Welinski, P. J. Woodburn, N. Lauk, R. L. Cone, C. Simon, P. Goldner, and C. W. Thiel, Electron spin coherence in optically excited states of rare-earth ions for microwave to optical quantum transducers, *Physical Review Letters* **122**, 247401 (2019).
- [15] J. R. Everts, M. C. Berrington, R. L. Ahlefeldt, and J. J. Longdell, Microwave to optical photon conversion via fully concentrated rare-earth-ion crystals, *Physical Review A* **99**, 063830 (2019).
- [16] L. Fan, C.-L. Zou, R. Cheng, X. Guo, X. Han, Z. Gong, S. Wang, and H. X. Tang, Superconducting cavity electro-optics: a platform for coherent photon conversion between superconducting and photonic circuits, *Science advances* **4**, eaar4994 (2018).
- [17] J. Holzgrafe, N. Sinclair, N. Sinclair, D. Zhu, D. Zhu, A. Shams-Ansari, M. Colangelo, Y. Hu, Y. Hu, M. Zhang, M. Zhang, K. K. Berggren, and M. Lončar, Cavity electro-optics in thin-film lithium niobate for efficient microwave-to-optical transduction, *Optica* **7**, 1714 (2020).
- [18] W. Fu, M. Xu, X. Liu, C.-L. Zou, C. Zhong, X. Han, M. Shen, Y. Xu, R. Cheng, S. Wang, *et al.*, Ground-state pulsed cavity electro-optics for microwave-to-optical conversion, arXiv preprint arXiv:2010.11392 (2020).
- [19] J. Orcutt, H. Paik, L. Bishop, C. Xiong, R. Schilling, and A. Falk, Engineering electro-optics in sige/si waveguides for quantum transduction, *Quantum Science and Technology* **5**, 034006 (2020).
- [20] W. Hease, A. Rueda, R. Sahu, M. Wulf, G. Arnold, H. G. Schwefel, and J. M. Fink, Bidirectional electro-optic wavelength conversion in the quantum ground state, *PRX Quantum* **1**, 020315 (2020).
- [21] L. Fan, C. Zou, R. Cheng, X. Guo, X. Han, Z. Gong, S. Wang, and H. Tang, Cavity electro-optic circuit for microwave-to-optical frequency conversion, in *Nonlinear Optics* (Optical Society of America, 2019) pp. NF2A–2.
- [22] M. Mirhosseini, A. Sipahigil, M. Kalaei, and O. Painter, Quantum transduction of optical photons from a superconducting qubit, arXiv preprint arXiv:2004.04838 (2020).
- [23] W. Jiang, C. J. Sarabalis, Y. D. Dahmani, R. N. Patel, F. M. Mayor, T. P. McKenna, R. Van Laer, and A. H. Safavi-Naeini, Efficient bidirectional piezo-optomechanical transduction between microwave and optical frequency, *Nature communications* **11**, 1 (2020).
- [24] M. Wu, E. Zeuthen, K. C. Balram, and K. Srinivasan, Microwave-to-optical transduction using a mechanical supermode for coupling piezoelectric and optomechanical resonators, *Physical Review Applied* **13**, 014027 (2020).
- [25] C. Zhong, Z. Wang, C. Zou, M. Zhang, X. Han, W. Fu, M. Xu, S. Shankar, M. H. Devoret, H. X. Tang, *et al.*, Proposal for heralded generation and detection of entangled microwave–optical-photon pairs, *Physical Review Letters* **124**, 010511 (2020).
- [26] J. I. Cirac, P. Zoller, H. J. Kimble, and H. Mabuchi, Quantum state transfer and entanglement distribution among distant nodes in a quantum network, *Physical Review Letters* **78**, 3221 (1997).
- [27] S. Wehner, D. Elkouss, and R. Hanson, Quantum internet: A vision for the road ahead, *Science* **362** (2018).
- [28] N. Lauk, N. Sinclair, S. Barzanjeh, J. P. Covey, M. Saffman, M. Spiropulu, and C. Simon, Perspectives on quantum transduction, *Quantum Science and Technology* **5**, 020501 (2020).
- [29] T. Neuman, M. Eichenfield, M. Trusheim, L. Hackett, P. Narang, and D. Englund, A phononic bus for coherent interfaces between a superconducting quantum processor, spin memory, and photonic quantum networks, arXiv preprint arXiv:2003.08383 (2020).
- [30] A. Rueda, W. Hease, S. Barzanjeh, and J. M. Fink, Electro-optic entanglement source for microwave to telecom quantum state transfer, *npj Quantum Information* **5**, 1 (2019).
- [31] D.-Q. Zhu and P.-B. Li, Preparation of entangled states of microwave photons in a hybrid system via the electro-optic effect, *Optics Express* **25**, 28305 (2017).
- [32] T. P. McKenna, T. P. McKenna, J. D. Witmer, J. D. Witmer, R. N. Patel, W. Jiang, R. V. Laer, P. Arrangoiz-Arriola, E. A. Wollack, J. F. Herrmann, and A. H. Safavi-Naeini, Cryogenic microwave-to-optical conversion using a triply resonant lithium-niobate-on-sapphire transducer, *Optica* **7**, 1737 (2020).
- [33] A. Rueda, F. Sedlmeir, M. C. Collodo, U. Vogl, B. Stiller, G. Schunk, D. V. Strekalov, C. Marquardt, J. M. Fink, O. Painter, *et al.*, Efficient microwave to optical photon conversion: an electro-optical realization, *Optica* **3**, 597 (2016).
- [34] C. Zhong, X. Han, H. X. Tang, and L. Jiang, Entanglement of microwave-optical modes in a strongly coupled electro-optomechanical system, *Physical Review A* **101**, 032345 (2020).
- [35] L.-M. Duan, M. D. Lukin, J. I. Cirac, and P. Zoller, Long-distance quantum communication with atomic ensembles and linear optics, *Nature* **414**, 413 (2001).
- [36] S. Mobassem, N. J. Lambert, A. Rueda, J. M. Fink, G. Leuchs, and H. G. L. Schwefel, Thermal Noise in Electro-Optic Devices at Cryogenic Temperatures, arXiv:2008.08764 [physics, physics:quant-ph] (2020), arXiv:2008.08764 [physics, physics:quant-ph].
- [37] C. Couteau, Spontaneous parametric down-conversion, *Contemporary Physics* **59**, 291304 (2018).
- [38] X. Guo, C.-l. Zou, C. Schuck, H. Jung, R. Cheng, and H. X. Tang, Parametric down-conversion photon-pair source on a nanophotonic chip, *Light: Science & Applications* **6**, e16249 (2017).
- [39] A. Rueda, Frequency multiplexed optical entangled source based on the pockels effect, arXiv preprint arXiv:2010.05356 (2020).
- [40] R. Dum, P. Zoller, and H. Ritsch, Monte carlo simulation of the atomic master equation for spontaneous emission, *Physical Review A* **45**, 4879 (1992).
- [41] K. Mølmer, Y. Castin, and J. Dalibard, Monte carlo wave-function method in quantum optics, *JOSA B* **10**, 524 (1993).
- [42] K. Jacobs, *Quantum measurement theory and its appli-*

- cations* (Cambridge University Press, 2014).
- [43] M. Kjaergaard, M. E. Schwartz, J. Braumüller, P. Krantz, J. I.-J. Wang, S. Gustavsson, and W. D. Oliver, Superconducting qubits: Current state of play, *Annual Review of Condensed Matter Physics* **11**, 369 (2020).
- [44] C. H. Bennett, D. P. DiVincenzo, J. A. Smolin, and W. K. Wootters, Mixed-state entanglement and quantum error correction, *Physical Review A* **54**, 3824 (1996).
- [45] S. Krastanov, V. V. Albert, and L. Jiang, Optimized entanglement purification, *Quantum* **3**, 123 (2019).
- [46] J. M. Kreikebaum, A. Dove, W. Livingston, E. Kim, and I. Siddiqi, Optimization of infrared and magnetic shielding of superconducting TiN and Al coplanar microwave resonators, *Superconductor Science and Technology* **29**, 104002 (2016).
- [47] M. Xu, X. Han, C.-L. Zou, W. Fu, Y. Xu, C. Zhong, L. Jiang, and H. X. Tang, Radiative cooling of a superconducting resonator, *Physical Review Letters* **124**, 033602 (2020).
- [48] V. Singh, C. Alduino, F. Alessandria, A. Bersani, M. Bissoni, C. Bucci, A. Caminata, L. Canonica, L. Cappelli, R. Cereseto, *et al.*, The CUORE cryostat: commissioning and performance, in *Journal of Physics: Conference Series*, Vol. 718 (2016).
- [49] C. Davis, *Search for Neutrinoless Double-Beta Decay with Majoron Emission in CUORE*, Ph.D. thesis (2020).
- [50] P. Campagne-Ibarcq, E. Zalys-Geller, A. Narla, S. Shankar, P. Reinhold, L. Burkhardt, C. Axline, W. Pfaff, L. Frunzio, R. Schoelkopf, *et al.*, Deterministic remote entanglement of superconducting circuits through microwave two-photon transitions, *Physical review letters* **120**, 200501 (2018).
- [51] J. Wenner, Y. Yin, Y. Chen, R. Barends, B. Chiaro, E. Jeffrey, J. Kelly, A. Megrant, J. Mutus, C. Neill, *et al.*, Catching time-reversed microwave coherent state photons with 99.4% absorption efficiency, *Physical Review Letters* **112**, 210501 (2014).
- [52] C. J. Axline, L. D. Burkhardt, W. Pfaff, M. Zhang, K. Chou, P. Campagne-Ibarcq, P. Reinhold, L. Frunzio, S. Girvin, L. Jiang, *et al.*, On-demand quantum state transfer and entanglement between remote microwave cavity memories, *Nature Physics* **14**, 705 (2018).
- [53] P. Kurpiers, P. Magnard, T. Walter, B. Royer, M. Pechal, J. Heinsoo, Y. Salathé, A. Akin, S. Storz, J.-C. Besse, *et al.*, Deterministic quantum state transfer and remote entanglement using microwave photons, *Nature* **558**, 264 (2018).
- [54] F. Marsili, V. B. Verma, J. A. Stern, S. Harrington, A. E. Lita, T. Gerrits, I. Vayshenker, B. Baek, M. D. Shaw, R. P. Mirin, *et al.*, Detecting single infrared photons with 93% system efficiency, *Nature Photonics* **7**, 210 (2013).
- [55] E. A. Dauler, M. E. Grein, A. J. Kerman, F. Marsili, S. Miki, S. W. Nam, M. D. Shaw, H. Terai, V. B. Verma, and T. Yamashita, Review of superconducting nanowire single-photon detector system design options and demonstrated performance, *Optical Engineering* **53**, 081907 (2014).
- [56] C. Wang, M. Zhang, M. Yu, R. Zhu, H. Hu, and M. Loncar, Monolithic lithium niobate photonic circuits for kerr frequency comb generation and modulation, *Nature communications* **10**, 1 (2019).
- [57] M. Piekarek, D. Bonneau, S. Miki, T. Yamashita, M. Fujiwara, M. Sasaki, H. Terai, M. G. Tanner, C. M. Nataraajan, R. H. Hadfield, *et al.*, High-extinction ratio integrated photonic filters for silicon quantum photonics, *Optics letters* **42**, 815 (2017).
- [58] S. Barzanjeh, M. Abdi, G. J. Milburn, P. Tombesi, and D. Vitali, Reversible optical-to-microwave quantum interface, *Physical Review Letters* **109**, 130503 (2012).